

ESTIMATE FOR CONSTRUCTION OF COMMUNITY TOILET AT BIL GABA PARA WARD-15, PLOT NO- 353/1234, MOUZA-MURADHI, JL-97 UNDER SAINTHIA MUNICIPALITY OF WEST BENGAL (MODEL NO - F)

TOILET SEATS - 2 NOS AND URINAL - 3 NOS

Reference of schedule of Rate : - PWD (W.B.), BUILDING WORKS, [with effect from 01.11.2017]  
 Incorporation of GST Act, 2017 & All addenda & Corrigenda of SOR, 01.12.2015.  
 PWD schedule of rates: Building and Sanitary & Plumbing w.e.f 01.11.2017

SL.NO

Item Description & Item No.

| SL.NO | Item Description & Item No.  | Total Quantity | Rate             | Unit  | Amount           |
|-------|--|----------------|------------------|-------|------------------|
| 1     | Earth work in excavation of foundation trenches or drains, in all sorts of soil (including mixed soil but excluding laterite or sandstone) including removing, spreading or stacking the spoils within a lead of 75 m. as directed. The item includes necessary trimming the sides of trenches, levelling, dressing and ramming the bottom, bailing out water as required complete. (a) Depth of excavation not exceeding 1,500 mm. PWD Building Works schedule Page - 1, Item - 2.a   | 5.816          | 119.27           | Cum   | 693.67           |
| 2     | Earth work in filling in foundation trenches or plinth with good earth, in layers not exceeding 150 mm, including watering and ramming etc. layer by layer complete. (Payment to be made on the basis of measurement of finished quantity of work). (a) With earth obtained from excavation of foundation. PWD Building Works schedule, Page - 1, Item - 3.a<br>1/5 = 1.163m <sup>3</sup><br>5.816 x   | 1.163          | 77.54            | Cum   | 90.18            |
| 3     | (A) Filling in foundation or plinth by silver sand in layers not exceeding 150 mm as directed and consolidating the same by thorough saturation with water, ramming complete including the cost of supply of sand. (payment to be made on measurement of finished quantity)<br>PWD Building Works schedule, Page - 2, Item - 4.a<br>1 x 4.850<br>x 2.8250 x 0.325 = 4.453 m <sup>3</sup>   | 4.453          | 572.55           | Cum   | 2549.57          |
| 4     | Single Brick Flat Soling of picked jhama bricks including ramming and dressing bed to proper level and filling joints with local sand. PWD Building Works schedule, Page - 14, Item - 1 (Corri. Page-01, Date-04-06-2018)  | 21.710         | 266.00           | Sqm   | 5774.86          |
| 5     | Ordinary Cement concrete (mix 1:1.5:3) with graded stone chips (20 mm nominal size) excluding shuttering and reinforcement, if any, in ground floor as per relevant IS codes.<br>a) Pakur Variety / Chandil Variety<br>PWD Building Works schedule, p-26 Item 10 a (Rate Analysis)   | 7.519          | 4846.48          | Cum   | 36440.68         |
| 6     | shuttering) In ground floor (A) [Pakur Variety] (a) 1:3:6 proportion PWD Building Works schedule, Page - 34, Item - 22, 1(A), Date-04-06-2018) Rate Analysis 1 ( Corri. Page-3RD, Date-04-06-2018)   | 2.434          | 4105.52          | Sqm   | 9992.84          |
| 7     | 25mm. thick damp proof course with cement concrete with stone chips (1:1.5:3) [with graded stone aggregate 10 mm nominal size] and admixture of water proofing compound as per manufacturer's specification followed by two coat of polymer based paint. (1st coat after 4 to 5 days of concrete laying and 2 nd coat just before brick masonry work) as directed (cost of water proofing compound & polymer based paint to be paid separately). (Chattering not required over concrete or painted surface). [Note: - Waterproofing as per item 9, polymer based paint as per item 8 (a) of subhead C of Section (C). PWD Building Works schedule, Page - 47, Item - 1 (Rate Analysis) | 4.544          | 159.16<br>173.00 | Sqm   | 728.56<br>786.11 |
| 8     | 125 mm brick work with 1st class bricks in cement mortar (1:4) in ground floor. PWD Building Works schedule, Page - 16, Item - 16, Corri page - 3, date - 04.06.2018 (Rate Analysis)<br>3x1.00 x 3.00 = 9.00 m <sup>2</sup><br>5 x 1.20 x 3.00 = 18.00 m <sup>2</sup>  | 27.000         | 584.53           | Sq.M. | 15782.31         |

|    |  |        |                             |      |                    |
|----|--|--------|-----------------------------|------|--------------------|
| 9  | Item-3<br>trenches.<br>course or below flooring or roof terracing or foundation<br>Supplying and laying polythine sheet (150 gm/sq.m) over dampproof   | 37.870 | 24.00                       | Sqm  | 908.88             |
| 10 | Item-36.f<br>Works schedule, Page -42,<br>PWD Building<br>(f) 25 mm to 30 mm shuttering without staging in foundation<br>after completion of works (upto roof of ground floor)<br>columns, lintels curved or straight including fitting, fixing and striking out<br>approved thickness with required bracing for concrete slabs, beams and<br>upto 4 m using approved stout props and thick hard wood planks of<br>approved thickness with required bracing for concrete slabs, beams and<br>columns, lintels curved or straight including fitting, fixing and striking out<br>after completion of works (upto roof of ground floor)<br>(a) 25 mm to 30 mm thick wooden shuttering as per decision & direction of<br>Engineer-In-Charge.                                       | 10.555 | 205.00                      | Sqm  | 2163.78            |
| 11 | PWD Building Works schedule, Page -42, Item- 36.a<br>1 x 4.85 x 2.8250 = 13.70 m2<br>2 (4.85 + 2.825) x 0.125 = 1.209 m2<br>4(.30+.025) x 3.00 = 6.60 m2<br>2 x 2 x 4.85 x 0.1250 = 2.46 m2<br>2 x 2 x 2.825 x 0.125 = 1.41 m2   | 26.058 | 363.00                      | Sqm  | 9459.05            |
| 12 | PWD Building Works schedule, p-48 Item 6(ii)<br>3 mm thick topping using gray cement (ii)25 mm<br>materials and labour.<br>In ground floor.<br>flooring works using cement @ 1.75 kg/sq.m all complete including all<br>roughening of concrete surface and application of cement slurry before<br>smooth finishing and rounding off corners including raking out joints or<br>stone chips listed in panels as directed with topping made with ordinary or<br>white cement (as necessary) and marble dust in proportion (1:2) in cluding<br>Artificial stone in floor, dado, staircase etc with cement mortar (1:2:4)with   | 13.700 | <del>269.00</del><br>240.01 | Sqm  | 3258.14<br>3685.30 |
| 13 | Reinforcement for reinforced concrete work in all sorts of structures<br>including distribution bars, stirrups, binders etc initial straightening and<br>removal of loose rust (if necessary), cutting to requisite length, hooking and<br>bending to correct shape, placing in proper position and binding with 16<br>gauge black annealed wire at every intersection, complete as per drawing<br>and direction. (a) For works in foundation and upto roof of ground<br>floor/upto 4 m.<br>(i) Tor steel/Mild Steel, JSPL/SWAYN/ELTRO/STEBL<br>PWD Building Works schedule, Page - 43, Item - 40.a.i.1 (Corr. 10th Page-01,<br>Date-23-01-2020) (Rate Analysis)<br>Item no , vol of conc. 7.519x1.20 % = 0.090 m3 x 35.315 cft = 3.186 cft x<br>225 kg = 717.00 kg = 0.717 MT | 0.717  | 54439.07                    | M.T. | 39032.81           |
| 14 | PWD Building Works schedule, Page -106, Item - 18<br>Collapsible gate with 40 mm x 10 mm x 6 mm Tee as top and bottom guide<br>rail, 20 mm x 10 mm x 2 mm vertical channels 100 mm apart in full<br>stretched position 20m x 5 mm MS flats as collapsible bracings properly<br>reverted and washered including 38 mm steel roller including locking<br>arrangements, fitted and fixed in position with lugs set in cement concrete<br>including cutting necessary hives chasing etc in walls, floors etc and making<br>good all damages.   | 4.200  | 4330.00                     | Sqm  | 18186.00           |
| 15 | Brick work with 1st class bricks in cement mortar (1:4)<br>(a) Foundation and plinth ground floor<br>PWD Building Works schedule, Page -15, Item-7.a (Rate Analysis)   | 3.776  | 4198.06                     | Cu.m | 15851.87           |
| 16 | Brick work with 1st class bricks in cement mortar (1:4)<br>(b) superstructure ground floor<br>PWD Building Works schedule, Page -15, Item-7.b (Rate Analysis)  | 13.631 | 4421.06                     | Cu.m | 60263.47           |
| 17 | Labour for Chipping of concrete surface before taking up Plastering work.<br>PWD Building Works schedule, P-192, It-1  | 13.700 | 21.00                       | Sqm  | 287.70             |

|    |   |         |                          |      |                    |
|----|---|---------|--------------------------|------|--------------------|
| 28 | 136.56 + 13.70 = 150.26 M2<br>PWD Building Works schedule, PWD, P-198, I-5<br>Floor<br>PROOF wall putty of approved make & brand.(1.5 mm thick) In Ground<br>Rendering the Surface of walls and ceiling with White Cement base WATER  | 150.260 | 122.00                   | Sqm  | 18331.72           |
| 27 | PWD Building Works schedule, Page - 74, Item no- 46(i). 25 mm thick<br>for joint filling).<br>materials. ( Using cement slurry @4.4kg/sq.m at back side and @2.4 kg/sq.m<br>(avg) cement mortar (1:3) complete in all respect with all labour and<br>pavement ,footpath etc including necessary underlay 25 mm thick<br>with (1:1.5:3) cement concrete lated in pannels or patterns as directed in<br>Supplying and laying chequered tiles of any shade and of approved quality       | 4.130   | <del>453.00</del> 456.00 | sq.m | 1870.89<br>1883.28 |
| 26 | PWD Building Works schedule, Page -141 . Item no-10 b)<br>b)250mm long.<br>16mm dia rod with concrete bolt and round fitting.<br>Iron hasp bolt of approved quality fitted and fixed complete (oxidised) with   | 2.000   | 159.00                   | Each | 318.00             |
| 25 | PWD Building Works schedule, Page -146 . Item no-31,(i)<br>(i) 150mm plate x 10mm dia rod x 12mm hexagonal/fluted.<br>quality fitted and fixed complete.<br>Anodised aluminium decorative handle (hexagonal / fluted) of approved   | 10.000  | 87.00                    | Each | 870.00             |
| 24 | PWD Building Works schedule, P-140, It No. - 5 (viii)<br>steel screws, with ISI mark. (viii) 100mm X 75mm X 3.50mm.<br>Iron butt hinges of approved quality fitted and fixed with   | 15.000  | 66.00                    | Each | 990.00             |
| 23 | PWD Building Works schedule, P-144, It No. 26 (vii)<br>fixed with cadmium plated screws . (vii) 225mm long x 10mm dia. bolt<br>manufactured from extruded section conforming to I.S. 204/74 fitted and<br>Anodised aluminium barrel / tower / socket bolt (full covered) of approved  | 5.000   | 84.00                    | Each | 420.00             |
| 22 | PWD Building Works schedule, P-125, It- 14(ii)<br>2 x 2.10 x 0.75 = 3.15 m2<br>ground floor.<br>Technology (DST) to satisfy IS:4020 door testing performance criteria. In<br>structure as per approved technology of Department of Science and<br>skins and a special sandwich core, so as to impart monolithic composite<br>shutters as per approved design with glass fibre reinforced plastic moulded<br>Supplying, fitting & fixing fibre reinforced polymer (FRP) Composite door | 3.150   | 2581.00                  | sq.m | 8130.15            |
| 21 | PWD Building Works schedule, P-115, It - 3 (i)<br>(i) 66mm x 90mm<br>Technology (DST) to satisfy IS: 4020 door testing performance criteria.<br>structure as per approved technology of Department of Science and<br>skins and a special sandwich core, so as to impart monolithic composite<br>Frame as per approved section with glass fibre reinforced plastic moulded<br>Supplying, fitting and fixing fibre reinforced polymer (FRP) Composite door                              | 9.900   | 497.00                   | MTR  | 4920.30            |
| 20 | 192 It- No. 15<br>etc . Note cement 0.152 m3/100 m2 PWD Building Works schedule, P-<br>Neat cement punning about 1.5 mm thick in wall ,dado, window sills, floors   | 11.510  | 32.76                    | Sqm  | 377.07             |
| 19 | PWD Building Works schedule, P-189 It- No. 1 (ii)(c) (Rate Analysis)<br>thick plaster<br>(ii) With 1:4 cement mortar<br>necessary (Ground floor). [Excluding cost of chipping over concrete surface]<br>including throating, nosing and drip course, scaffolding/staging where<br>rounding off or chamfering corners as directed and raking out joints<br>Plaster (to wall, floor, ceiling etc.) with sand and cement mortar including  | 13.700  | 119.55                   | Sqm  | 1637.84            |
| 18 | PWD Building Works schedule, P-189 It- No. 1 (Rate Analysis)<br>(c) 15 mm thick plaster<br>(i) With 1:6 cement mortar<br>necessary (Ground floor). [Excluding cost of chipping over concrete surface]<br>including throating, nosing and drip course, scaffolding/staging where<br>rounding off or chamfering corners as directed and raking out joints<br>Plaster (to wall, floor, ceiling etc.) with sand and cement mortar including   | 136.560 | 132.55                   | Sqm  | 18101.03           |

|    |   |        |         |                |         |
|----|---|--------|---------|----------------|---------|
| 37 | PWD Building Works schedule, P-200 Item-2(b)(iv)<br>(iv) Two coats (with any shade except white)<br>(b) On steel or other metal surface :<br>approved putty etc. on the surface, if necessary :<br>brand including smoothening surface by sand papering etc. including using of<br>(A) Painting with best quality synthetic enamel paint of approved make and   | 5.640  | 79.00   | Sqm            | 445.56  |
| 36 | PWD Building Works schedule, P/200 Item-1(a)<br>etc.<br>a) Priming one coat on steel or other metal surface with synthetic oil bound<br>primer of approved quality including smoothening surfaces by sand papering  | 5.640  | 29.00   | Sqm            | 163.56  |
| 35 | PWD Building Works schedule, P-104 Item-13 A (i) (3rd Corrigendum<br>Page No 91)<br>(i) Grill weighing above 10 Kg/sq.mtr and up to 16 Kg/sq. mtr.<br>welded with M.S, W.I. Flats and bars of windows, railing etc. fitted and fixed<br>with necessary screws and lugs in ground floor.<br>(a) M.S.or W.I. Ornamental grill of approved design joints continuously  | 0.144  | 9888.00 | Qntl           | 1423.87 |
| 34 | PWD Building Works schedule, Page -200 . Item no- 2(A)(a)(iv)<br>(iv) Two coats (with any shade except white)<br>With super gloss (hi-gloss) -<br>(a) On timber or plastered surface :<br>Page - 200 . Item no- 1 (b)<br>approved putty etc. on the surface, if necessary :<br>brand including smoothening surface by sand papering etc. including using of<br>(A) Painting with best quality synthetic enamel paint of approved make and   | 6.350  | 81.00   | Sqm            | 514.35  |
| 33 | PWD Building Works schedule, Page -200 . Item no- 1 (b)<br>etc.<br>(b) Priming one coat on timber or plastered surface with synthetic oil bound<br>primer of approved quality including smoothening surfaces by sand papering   | 6.350  | 38.00   | Sqm            | 241.30  |
| 32 | PWD Building Works schedule, Page -197, Item no- 17(a)<br>79.69+18.00+36.00 = 136.69 m <sup>2</sup><br>in ground floor (two coats)(a) normal acrylic emulsion.<br>labour, scaffolding and all incidental charges but excluding the cost of primer<br>quality, as per manufacturer's specification and as per direction of EIC to be<br>applied over Acrylic primer as required. The rate includes cost of materials,<br>Protective and Decorative Acrylic Exterior emulsion paint of approved | 57.700 | 67.00   | m <sup>2</sup> | 3865.90 |
| 31 | PWD Building Works schedule, Page -196, Item no- 8(b)<br>(b) two coats.<br>manufacturer's specification and as per direction of the EIC in Ground Floor<br>including scraping and repairing the surface thoroughly, complete as per<br>Textured (Martt Finish) or Smooth Finish Acrylic exterior emulsion paint<br>plastered or concrete surface old or new surface to receive Decorative<br>Applying exterior grade Acrylic Primer of approved quality and brand on                          | 57.700 | 45.10   | m <sup>2</sup> | 2602.27 |
| 30 | PWD Building Works schedule, Page -196, Item no- 9(b) .<br>smoothening surface (b) two coats<br>Dry Dèstempering intertal walls or ceiling including cleaning, washing,   | 66.060 | 49.00   | m <sup>2</sup> | 3236.94 |
| 9  | PWD Building Works schedule, Page -74, Item no- 46(i).<br>44.63+19.20+13.90-13.70 = 66.03 M <sup>2</sup><br>direction of the E-I-C ( Ground Floor ) ( b ) Two Coats<br>thoroughly, complete as per manufacturer's specification and as per<br>Acrylic emulsion paint including scraping and repairing the surface<br>plastered and concrete surface old or new surface to receive Distemper   | 66.030 | 44.20   | m <sup>2</sup> | 2918.53 |

|    |  |         |                            |       |                              |
|----|--|---------|----------------------------|-------|------------------------------|
| 47 | PWD Building Works schedule, Page -261, It- 9 (xxvi) SANITARY AND PLUMBING WORKS   | 3.000   | 127.00                     | Each  | 381.00                       |
| 46 | PWD Building Works schedule, Page -261, It- 9 (x) in earthen pot of size 30cm. (F. Vivicon) well branched (Bushy) of height 120cm - 135 cm   | 3.000   | 187.00                     | Each  | 561.00                       |
| 45 | Supplying and planting of different plants / trees (supplying well grown plants bushy and healthy, minimum height as specified i.e. exposed height including all leads and lifts, carriage, handling, manuring applying pesticide and fertilizer etc. i) Furcaria Vertegated 10 to 12 leaves in height 20-30 cm in earthen pot of size 25 cm   | 10.000  | 162.00                     | Each  | 1620.00                      |
| 44 | PWD Building Works schedule, P-268, It-17(e) Painting block letters or digits in Black Japan or any approved paint as per direction. (e) Size above 7.5 cm. and upto 10 cm.  | 450.000 | 12.00                      | Each  | 5400.00                      |
| 43 | Supplying bubble free float glass of approved make and brand conforming to IS: 2835-1987. (iv) 5mm thick coloured / tinted / smoke glass. PWD Building Works schedule, P-243, I-9  | 1.080   | 585.00                     | Sq.M. | 631.80                       |
| 42 | Clear angle ( Non-annodized).  | 6.480   | 263.00                     | MTR   | 1704.24                      |
| 41 | Louvered Section.  | 7.200   | 658.00                     | MTR   | 4737.60                      |
| 40 | Supplying profiles of required section made of Aluminium Alloy Extrusions conforming to IS: 732-1983 and IS: 1285- 1975; Annodized (with required film thickness and specified colour / natural) matt finished conforming to IS: 1868-1983 for fabrication of composite door, sliding & casement windows, partitions, formed of basic sections of any ISI embossed / certified make and brand as per direction of Engineer - In- Charge. (Payment will be made on finished length of the work). (A) In 10-12 Micron thickness Annodizing film (I) Natural white (h) Louvered window. i) Top, bottom and side member. PWD Building Works schedule, PWD, P-233, I- 1(h) !  | 6.500   | 183.00                     | MTR   | 1189.50                      |
| 39 | Supplying, fitting & fixing 1st quality Ceramic tiles in walls and floors to match with the existing work & 4 nos. of key stones (10mm) fixed with araldite at the back of each tile & finishing the joints with white cement mixed with colouring oxide if required to match the colour of tiles including roughening of concrete surface, if necessary or by synthetic adhesive & grout materials etc. B) Wall Area of each tile above 0.09 Sq.m (ii) Other than Coloured decorative including white PWD Building Works schedule, page-64, Item:35.(B.) (b).(ii) ( 3rd Corrigendum, Page 36) (2 4.85 + 2.8250 ) x 2.10 = 36.84 m2 (1x2 x 2.325 x 2.10 = 9.77m2 2 x 2 x 1.60 x 2.10 = 13.44 m2  | 60.050  | <del>1047.00</del> 1029.00 | Sqm   | <del>62872.35</del> 21791.45 |
| 38 | Supplying and laying true to line and level vitrified tiles of approved brand (size not less than 600 mm X 600 mm X 10 mm thick) in floor, skirting etc. set in 20 mm sand cement mortar (1:4) and 2 mm thick cement slurry back side of tiles using cement @ 2.91Kg/sqm or using polymerised adhesive (6 mm thick layer applied directly over finished artificial stone floor/Mosaic etc without any backing course) laid after application slurry using 1.75 Kg of cement per sqM below mortar only, joints grouted with admixture of white cement and colouring. Pigment to match with colour of tiles / epoxy grout materials of approved make as directed and removal of wax coating of top surface of tiles with warm water and polishing the tiles using soft and dry cloth upto mirror finish complete including the cost of materials, labour and all other incidental charges complete true to the manufacturer's specification and direction of Engineer-in-Charge. (White cement, synthetic adhesive and grout material to be supplied by the contractor) (1:4) & 2 mm thick cement slurry at back side of tiles, 0.2 kg/ Sq.m white cement for joint filling with pigment. (A) Deep Colour & White PWD Building Works schedule, Page-66 Item-36 (A) ( 3rd Floor | 13.700  | <del>1676.00</del> 1649.00 | Sqm   | <del>22961.20</del> 23002.3  |
|    |  |         |                            |       | 0.00                         |







|    |   |       |         |      |          |
|----|---|-------|---------|------|----------|
| 48 | Supplying, fitting and fixing Anglo-Indian W.C. in white glazed vitreous china ware of approved make complete in position with necessary bolts, nuts etc.<br>a) With 'P' trap (with vent)<br>PWD S&P Schedule, page-79, item no -3 (a)  | 5.000 | 3104.00 | Each | 15520.00 |
| 49 | Supplying, fitting and fixing Closet seat of approved make with lid and C.P. hinges, rubber buffer and brass screws complete. (b) Anglo Indian hinges, rubber buffer and brass screws complete. (a) Plastic (hallow type) White<br>PWD S&P Schedule, page-81, item no 10.b.i  | 2.000 | 380.00  | Each | 760.00   |
| 50 | Supplying, fitting and fixing Flat back urinal (half stall urinal) in white vitreous chinaware of approved make in position with brass screws on 75 mm X 75 mm X 75 mm wooden blocks complete<br>(ii) 470 mm X 280 mm X 340 mm<br>PWD S&P Schedule, page-80, item no-6/(ii)   | 2.000 | 945.00  | Each | 1890.00  |
| 51 | Supplying fitting and fixing squating plate with integrated flushing in white vitreous set in cement concrete (6:3:1) with jhama chips complete.<br>( Payment of concrete will be paid seperately )<br>( 1 ) 450 mm x 350 mm  | 2.000 | 881.00  | each | 1762.00  |
| 52 | Supplying, fitting and fixing 10 litre P.V.C. low-down cistern conforming to I.S. specification with P.V.C. fittings complete, C.L. brackets including two coats of painting to bracket etc.<br>PWD S&P Schedule, Page No.-36 Item No.-2,   | 2.000 | 1015.00 | Nos  | 2030.00  |
| 53 | Supplying, fitting and fixing 32 mm dia. Flush Pipe of approved make with necessary fixing materials and clamps complete.<br>i) Polythene Flush Pipe<br>PWD S&P Schedule, Page no 81. Item no. 1(i)   | 2.000 | 155.00  | Each | 310.00   |
| 54 | Supplying, fitting and fixing urinal flush pipe fittings of approved brand.<br>(a) C.P. urinal flush pipe fittings range of one PWD S&P Schedule, S.P.81, item 12/a   | 2.000 | 414.00  | Each | 828.00   |
| 55 | Supplying, fitting and fixing white vitreous china best quality approved make wash basin with C.L. brackets on 75 mm X 75 mm wooden blocks, C.P. waste fittings of 32 mm dia., mending good all damages and painting the brackets with two coats of approved paint<br>(i) 550 mm X 400 mm size<br>PWD S&P Schedule, P-41, It 2 (ii) | 2.000 | 2208.00 | Each | 4416.00  |
| 56 | Supplying fitting and fixing pedestal of approved make for wash basin ( White )<br>PWD S&P Schedule, P-41, It 3   | 2.000 | 1497.00 | Each | 2994.00  |
| 57 | Supplying, fitting and fixing approved brand P.V.C. CONNECTOR white flexible, with both ends coupling with heavy brass C.P. nut, 15 mm dia., (iii) 600 mm long<br>PWD S&P Schedule, Page No.-43 Item No.-9-iii  | 5.000 | 107.00  | Each | 535.00   |
| 58 | Supplying, fitting and fixing approved brand 32 mm dia. P.V.C. waste pipe, with PVC coupling at one end fitted with necessary clamps.<br>(iv) 1050 mm long each<br>PWD S&P Schedule, Page No.-43 Item No. 10-iv   | 2.000 | 91.00   | Each | 182.00   |
| 59 | (f) Hand Shower (Health Faucet) with 1mtr Flexible Tube with Wall Hook (Equivalent to Code No. 573 & Model -ALLIED of Jaquar or similar).<br>PWD S&P Schedule, Page No.-3 Item No.- 3 f,  | 2.000 | 1251.00 | Each | 2502.00  |
| 60 | (a) (i) Chromium plated Bib Cock short body (Equivalent to Code No. 511 & Model - Tropical / Sumthing Special of ESSCO or similar brand).<br>PWD S&P Schedule, Page No.-6 Item No.-7-a-i  | 5.000 | 539.00  | Each | 2695.00  |
| 61 | (b) (i) Chromium plated Stop Cock (Equivalent to Code No. 513(A) & 513(B) & Model - Tropical / Sumthing Special of ESSCO or similar<br>PWD S&P Schedule, Page No.-7-b-i   | 3.000 | 493.00  | Each | 1479.00  |
| 62 | Chromium plated angular Stop Cock with wall flange (Equivalent to Code No. 5053 & Model - Florentine of Jaquar or similar brand). PWD S&P Schedule, Page No.-6 Item No.-7-d-i,  | 3.000 | 815.00  | Each | 2445.00  |




|    |  |       |          |        |          |
|----|--|-------|----------|--------|----------|
| 92 | Supplying, fitting and fixing soap holder.<br>(b) Fibre glass  | 2.000 | 58.00    | Each   | 116.00   |
| 91 | Supplying, fitting and fixing bevelled edged mirror 5.5 mm thick silver red as per I.S. 3438 / 1965 together with brass C.P. hinges. (ii) 600 mm X 450 mm<br>P.W.D S&P Schedule, P-81, It-15(ii)   | 2.000 | 484.00   | Each   | 968.00   |
| 90 | Supplying, fitting and fixing towel rail with two brackets.<br>(a) C.P. over brass<br>(ii) 25 mm dia. and 600 mm long<br>Schedule, p No 82 I No- 22 (a)(ii)<br>P.W.D S&P   | 2.000 | 430.00   | Each   | 860.00   |
| 89 | Construction of circular soak well 2.5 metre deep in all types of sandy soils with dry brick work upto 1.6 metre from the bottom having 150 mm intermediate cement brick work (1:4) band all round and cement plaster (1:4) to inside face upto the depth of cement brick work, 15mm thick cement plaster (1:4) upto 0.90 metre from top with 20mm thick cement plastering (1:4) to (1:4) on outer face from top of the well upto G.L. and 6 mm thick cement plaster of inside of the well with brick metal (50 mm to 63 mm size) including R.C.C. cover slab of 100 mm thick with cement conc (1:1.5:3) with stone chips with necessary reinforcement and shuttering including one 560 mm dia. R.C.C. manhole cover (heavy type) of approved make supplied, fitted and fixed in the cover slab with necessary fittings, making necessary arrangements for pipe connections, excavation of well including shoring, dewatering and removing the excess earth from the premises as per direction complete in all respect with all costs of labour and materials. With 250 mm thick dry brick work and 250 mm thick cement brick work (1:6) and 1.00m inside dia.<br>(Other than SAIL/TATA/RINL)<br>S.P.89, Item No-4 7th Corrigenada Volume II   | 1.000 | 13899.00 | Each   | 13899.00 |
| 88 | Construction of septic tank of different capacities as per approved drawing with 1st class brick work in cement mortar (1:4) including two 560 mm dia. R.C.C. manhole cover (heavy type) of approved make supplied, fitted and fixed in the 100mm thick R.C.C (1:1.5:3) top slab with necessary fittings, 20mm thick cement plaster (4 : 1) with neat cement finish to the internal surfaces and 15 mm thick cement plaster (4 : 1) to outside wall upto 200 mm below G.L floor finished with 25 mm thick grey artificial stone over 100 mm thick R.C.C (1:1.5:3) bottom slab including supplying, fitting and fixing all necessary specials, fittings, S.W. tees, C.I. foot rest etc. including excavation earth in all sorts of soil, shoring, bailing out and pumping out water as necessary, ramming, dressing the bed and refilling the sides of the tanks with earth, removing spoils, filling up the chamber with clear water, removing foreign materials from the chamber and including constructing attached inspection pit as per approved drawing and connecting all necessary pipes, joints etc. with internal plaster work and artificial stone flooring is to be done with admixture of water proofing compound @ 0.5% by weight of cement with all costs of labour and materials.<br>(ii) For 20 users<br>(A) With Pakur variety. (J.S.W./J.S.P.L./SHYAM/SRMB/ELBCTROSTBEL/SSL)<br>P.W.D S&P Schedule, S.P.88, Item No-3(ii)(A) 7th Corrigenada Volume II | 1.000 | 42400.00 | Each   | 42400.00 |
| 87 | Constructing inspection pit of inside measurement 600mm X 600mm X upto 600mm (depth) with 250 mm thick 1st. class brick work in cement mortar (1:4) on all sides, bottom of the pit consisting of 100 mm thick cement concrete (1:3:6) with stone chips over a layer of thama brick flat soiling, 15 mm thick (1:4) cement plaster to inside walls and out-side walls upto G.L. and 20 mm thick (1:4) plaster to bottom of the pit, providing necessary invert with cement concrete (1:3:6) with stone chips as per direction, neat cement finishing to entire internal surfaces, top of the pit covered with 100 mm thick R.C.C. slab (1:1.5:3) with stone chips and necessary reinforcements upto 1% and shuttering including 6 mm thick cement plaster (1:4) in all external surfaces of the slab and one 560 mm dia. R.C.C. manhole cover of approved make supplied, fitted and fixed in the slab with necessary fittings, necessary earthwork in excavation in all sorts of soil, filling sides of the pit with earth and removing spoils after work complete in all respect with all costs of labour and materials.<br>(i) With Pakur variety (Other than SAIL/TATA/RINL).<br>P.W.D S&P Schedule, S.P.87, Item No-1/(i), 7th Corrigenada Volume II   | 2.000 | 6153.00  | Each   | 12306.00 |
| 86 | 1) UPVC Fittings: d) Shoe (i) 75 mm. Dia.<br>2.000   | 78.00 | Mtr      | 156.00 |          |



MODEL DRAWING FOR CONSTRUCTION OF C.T./P.T. TOILET SEATS 2 NOS URINAL 3 NOS  
 MODEL NO.- F

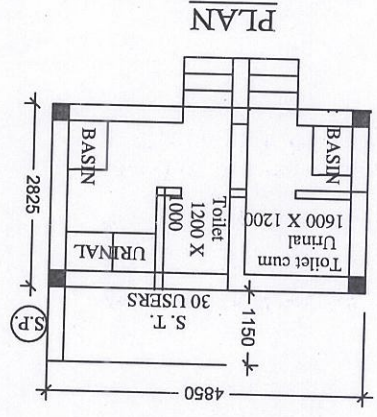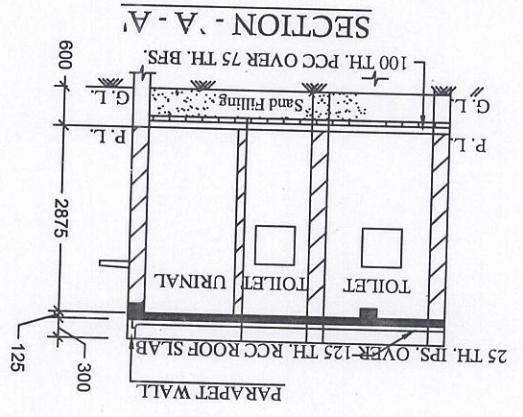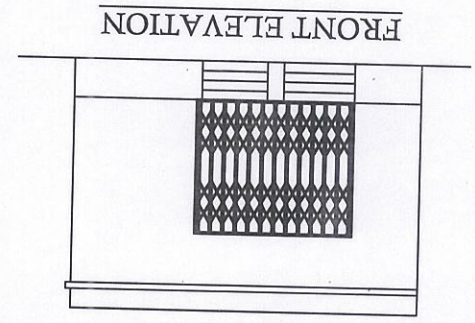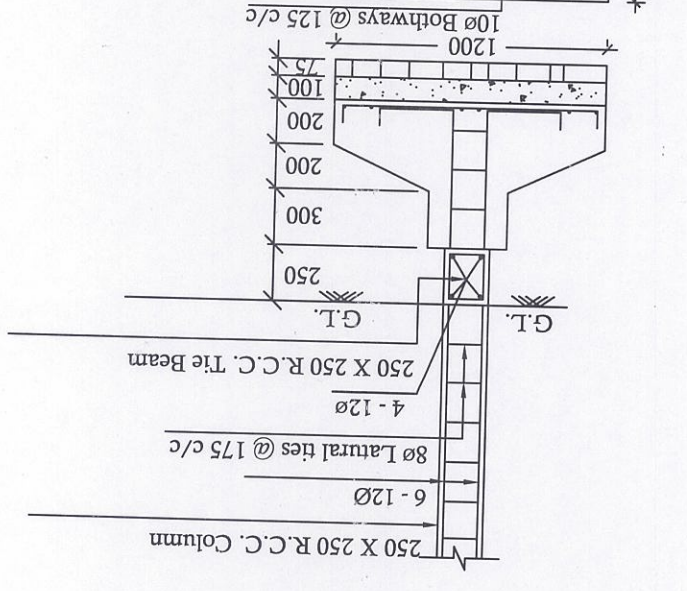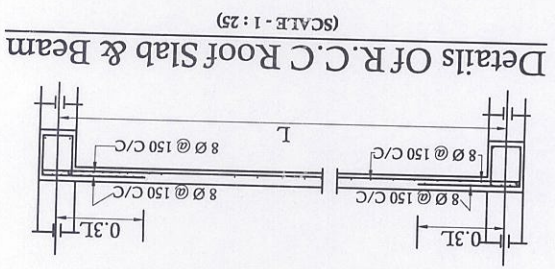

LAYOUT PLAN



Prepared by *[Signature]*  
 Sub-Assistant Engineer  
 Sainthia Municipality  
 Sainthia, Birbhum

Approved by *[Signature]*  
 Chairman  
 Sainthia Municipality  
 Sainthia, Birbhum

3/6/2025