

MODEL ESTIMATE

**NAME OF WORK:- ESTIMATE FOR ELECTRICAL WORK OF TOILET BLOCK MODEL G
(INSTITUTIONAL) AT NEAR BANSHIHARI HIGH SCHOOL WARD NO. - 05 UNDER
DIFFERENT MUNICIPALITIES OF WEST BENGAL BUNIADPUR
[ASPIRATIONAL PARAMETER]**

Sl No.	Item Description	Unit	Quantity	Rate	Amount
1	Distribution wiring in 2 x 22/0.3 (1.5 sqmm) single core stranded 'FR' PVC insulated & unsheathed copper wire (Brand approved by EIC) in 20mm size PVC rigid conduit 'FR' (Precision make), with 1x22/0.3 (1.5 sqmm) single core stranded 'FR' PVC insulated & unsheathed copper wire for ECC, to light/fan/call bell points with Piano Key type switch fixed on MS CRC sheet metal (16 SWG) switch board cum JB on wall complete with 2 no. suitable size "Ph & N" copper bar incl. bakelite/Perspex (wall matching color) top cover 3 mm thick and incl. 175mmx100mmx65mm inspection box, making earthing attachment, painting the MS box and mending good the damages to original finish.[PWD Schedule Page No-E-14 Item No-2a]	Point	12 17	654.84	7858.08 11132.28
	Average run 5 mtr				
2	Distribution wiring in 1.1 KV grade 22/0.3 (1.5 sqmm) single core stranded 'FR' PVC insulated & unsheathed copper wire (Brand approved by EIC) in 20mm size PVC rigid conduit 'FR' (Precision make), with 1.1 KV grade 1 x 22/0.3 (1.5 sqmm) single core stranded 'FR' PVC insulated & unsheathed copper wire as ECC, to 5A 3 pin flush type plug socket & Piano Key type switch fixed on MS CRC sheet metal (16 SWG) switch board cum JB on wall incl. bakelite/Perspex (wall matching color) top cover 3 mm thick and incl. painting the MS box and mending good the damages to original finish. On Board (only for pay counter) [PWD Schedule Page No-E-15; I-4a]	Point	2	71.69	143.38
3	Supplying and fixing 240V 32A Double Pole AC Type 30mA RCCB.(Complete Set) (ISI marked) [Make- Legrand] (Cat No 4113/95) [Legrand] [Page No-92]	Nos	1	5942.00	5942.00
4	Distribution wiring in 1.1 KV single core stranded 'FR' PVC insulated & unsheathed copper wire (Brand approved by EIC) in 20mm size PVC rigid conduit 'FR' (Precision make) incl. necy. fittings as required 2 x 36/0.3 (2.5 sqmm) + 1 x 22/0.3 (1.5 sqmm) ECC [PWD Schedule Page No-E-14 Item No-1a(ii)]	mtr	30 19	127.33	3819.90 2419.27

5	Supplying and fixing double-door SPN MCB Distribution Board with IP-42/43 protection, concealed in wall after cutting the wall & mending good the damages to original finish incl. Inter connection with suitable size of copper wire and neutral link & provision for earthing attachment.a) For (2+4 way) (Make -Havells) [PWD Schedule Page No-D-9;Iteam No-13] (upto 6 seats)	No	1	1000.45	1000.45
6	Supplying and fixing 240/415 V MCB of Breaking capacity 10kA & C characteristics on din rail of existing DBs and necessary connection 6-32A SP MCB (Make -Havells) [PWD Schedule Page No-D-6;Iteam No-7]	Nos	4	179.76	719.04
7	Supplying and fixing 240/415 V MCB Isolator on din rail of existing DBs and necessary connection.40A DP MCB Isolator (Make -Havells)[PWD Schedule Page No-D-5;Iteam No-6]	Nos	1	222.56	222.56
8	Supply of TMC501 conventional industrial batten (Philips make) LED Tube,model no- TMC501 P1xT-LED 22W P3241 (WB I & WD schedule P-113, I- 5:3 F.22)	Nos	4	482.57 464.53	1858.12 1930.28
9	Fixing only single/twin fluroscent light fitting complete with all accessories directly on wall/ceiling by screws etc.. [PWD Schedule Page No-C-2;Iteam No-14a]	Nos	4	92.02	368.08
10	Supply & fixing Bulk head light fittings with die cast aluminium housing frosted/clear glass on wall/ceiling incl S/F 9 watt LED Lamp complete set. [Make - Havells] (PWD sch - Page--D-13, I-23)	Nos	3 6	694.53	4167.18 2083.59
11	Supply & fixing smart bright street light complete with all accessories to be fixed from the wall of building or on pole incl. making holes /providing clamping arrangement & necy. GI reducer as required.S&F 40 mm GI Pipe 1.5 mtr average length & s&f necy length of 1.5 sqmm pvc insulated single core copper wire & making connections as required & mending good damages incl wall paingting. (30 Watt) (Make - Bajaj)[WB I&WD sch P-111, I-f.9.0.2]	Nos	1	3227.12 3106.48	3227.12 3106.48
12	Supply of 12" domestic metal exhaust fan 9" (225mm)SWEEP. TRANS AIR - (upto 4 seats) or (Make-Crompton/Havells/Bajaj) (UD & MA schedule P-14, I-5))	Nos	5 4	1863.00	9315.00 7452.00
13	Fixing only exhaust fan after making hole in wall and making good damages and smooth cement finish etc. as practicable as possible and providing necy. length of PVC insulated wire and making connection for exhaust of following diameter: 22.5 cm (9") [PWD Schedule Page No-C-4;Iteam No-28(b)]	Nos	5 4	264.29	1057.16 1321.45
14	Fixing only louver shutter/cowl on wall with necy. bolts & nuts (6 mm dia x 62 mm long) For 22.5 cm(9") Exhaust fan [PWD Schedule Page No-C-4;Iteam No-30(b)]	Nos	5 4	87.74	350.96 438.70

15	S/F 240V 25A Modular type starter (brand approved by EIC)with 25 A. Modular switch DP MCB (C-Curve)and 4 Module G.I. Moduar type switch board with 4 Module Top Cover Plate flushed in wall incl. S/F switch board and Cover Plate and making necy. Connections with PVC Copper wire and earth connectivity wire etc. as per schedule [for Pump][PWD Schedule Page No-E-19, Item No-17]	Nos	1	838.88	838.88
16	Supply & Fixing 240 V, 16/20 A Piano key type switch (Brand approved by EIC) on sheet metal switch board incl. S & F 100x100x65mm MS (16SWG) switch board and bakelite/perspex top cover of 3mm thick by Brass screws after making housing for switch by cutting bakelite/perspex cover and making necessary connections as required. (For Hand Dryer machine)[PWD sch P- E-6, I-17(b)]	Each	1	215.07	215.07
17	Supply and Fixing of 2 mm Polyvinyl glow sign board made of 22 SWG GI sheet box with 1"X1" aluminum channel for fixing the vinyl board after necessary cutting the letter as required & s/f LED tube light fittings along with all accessories. (16 sqft @495.00/sqft) (UD & MA schedule P-14, I-4)	Nos	1	7920.00	7920.00
18	Earthing installation by GI earth Spike (1830 X 20 mm) including 8SWG GI EarthWire & GI nuts, bolts, washer etc.	Nos	1	450.00 481.50	481.50 450.00
				Total	47845.08
				Add 18% GST	8612.11
				Total With GST (A)	56457.19
				Cess@1%	564.57
				total	57021.77
	Contingency Amount on "A"			Contingency@3%	1695.72
	(Total+GST)=Rs:			Total	58715.48
				Say Rs.	58715.00

W Ghosh
10.02.26
Junior Engineer (Elec.)
On deputation
Buniadpur Municipality

Amr 10.02.26
Chairperson
Buniadpur Municipality
Buniadpur, D/ Dinajpur

Technically Vetted Rs.: 60,578.00

(Rupees Sixty thousand five hundred


Seventy eight only.)

60
Junior Engineer 24.02.26
Electrical & Mechanical Division
SUDA


W Ghosh
24.02.26
ASSISTANT ENGINEER
ELECTRICAL & MECHANICAL DIVISION
SUDA

ds 5/3/26
Executive Engineer (E/M)
O/O the Secretary M.E. Dte.
Government of West Bengal


MODEL DRAWING FOR CONSTRUCTION OF C. T./P.T.
TOILET SEATS 4 Nos URINAL 5 Nos
MODEL NO. - G

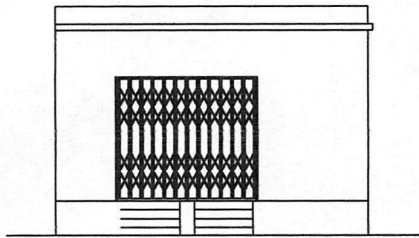


FRONT ELEVATION

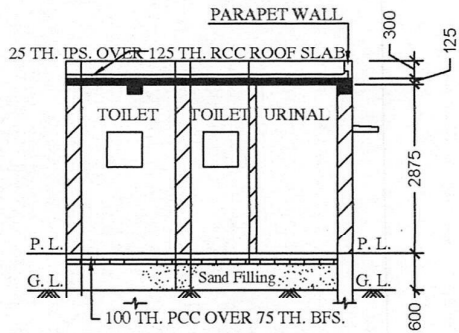



SECTION - 'A - A'

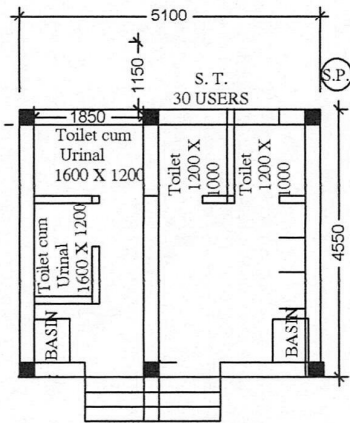



PLAN

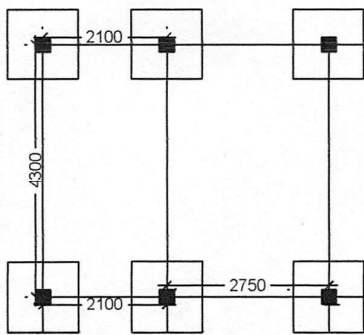

LAYOUT PLAN

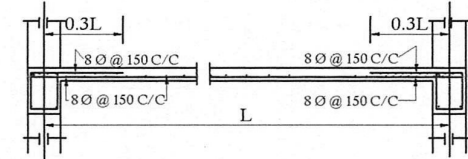

Details Of R.C.C Roof Slab & Beam
(SCALE - 1 : 25)

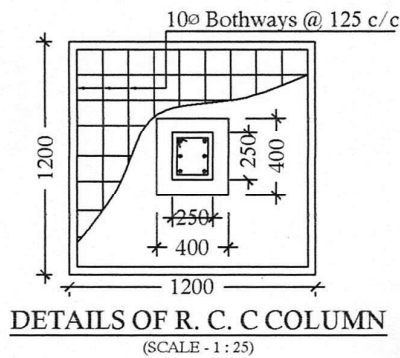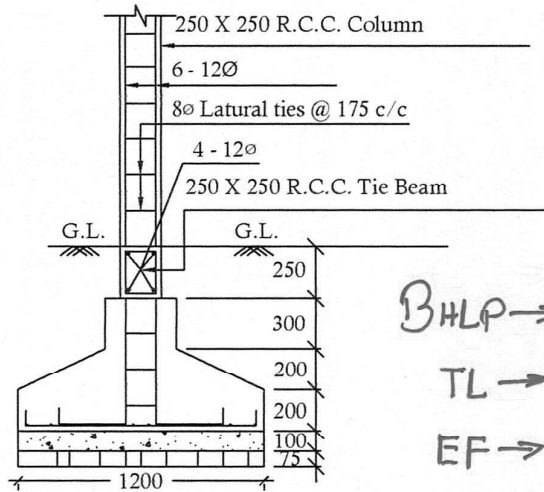

DETAILS OF R. C. C COLUMN
(SCALE - 1 : 25)

BHLP → 06
TL → 04
EF → 04
CF → 01
OL → 01
G.S.B → 01
17 pts

W. K. Singh
10.02.26
Junior Engineer (Elec.)
On deputation
Buniadpur Municipality

10.12.26
Chairperson
Buniadpur Municipality
Buniadpur, D/ Dinajpur