

**Civil & Sanitary Work Estimate For Construction of the Public Toilet Block
at Jubilee High School ward no XIII (Model 'F')**

No. Of seat - Male - (W.C. -1 + Urinal -2) & Female - (W.C. -1 + Urinal -1) = **Total (W.C. -2 & Urinal -3)**

Rate As per PWD Building Works Schedule (Volume 1) With effect from 01.11.2017

13

| Sl. No. | Item Description & Item No. | | | | | | | Quantity | Rate | Unit | Amount |
|---------|--|------|-----|--------|-------|-------|--------|----------|----------|------|----------|
| | Details | Side | No. | L | B | H | QNTY. | | | | |
| 1 | Earth work in excavation of foundation trenches or drains, in all sorts of soil (including mixed soil but excluding laterite or sandstone) including removing, spreading or stacking the spoils within a lead of 75 m. as directed. The item includes necessary trimming the sides of trenches, levelling, dressing and ramming the bottom, bailing out water as required complete. (a) Depth of excavation not exceeding 1,500 mm. PWD Building Works schedule Page - 1, Item -2.a | | | | | | | 10.37 | 11927.00 | %Cum | 1236.83 |
| | Column | | 4 | 1.200 | 1.2 | 1.125 | 6.480 | | | | |
| | Tie Beam | | 1 | 18.175 | 0.35 | 0.375 | 2.390 | | | | |
| | Reservior | | 1 | 1 | 1 | 1.5 | 1.500 | | | | |
| | | | | | | | 10.370 | | | | |
| 2 | Single Brick Flat Soling of picked jhama bricks including ramming and dressing bed to proper level and filling joints with local sand. PWD Building Works schedule, Page- 14, Item - 1 (Corri. Page-01, Date-04-06-2018) | | | | | | | 46.06 | 530.40 | Sqm | 24430.22 |
| | Column | | 4 | 1.200 | 1.2 | | 5.760 | | | | |
| | Tie Beam | | 1 | 18.175 | 0.25 | | 4.540 | | | | |
| | Floor 1 | | 1 | 4.6 | 2.325 | | 10.700 | | | | |
| | Platform | | 1 | 17.3 | 1.2 | | 20.760 | | | | |
| | Ramp | | 1 | 2.75 | 1.2 | | 3.300 | | | | |
| | Reservior | | 1 | 1 | 1 | | 1.000 | | | | |
| | | | | | | | 46.060 | | | | |
| 3 | Supplying and laying Polythene Sheet (150gm / sq.m.) over damp proof course or below flooring or roof terracing or in foundation or in foundation trenches. PWD Building Works schedule, Page -47, Item -3 | | | | | | | 26.70 | 28.80 | Sqm | 768.96 |
| | Open Space | | 1 | 17.3 | 1.5 | | 25.950 | | | | |
| | Front Stair | | 1 | 1.5 | 0.5 | | 0.750 | | | | |
| | | | | | | | 26.700 | | | | |
| 4 | Cement concrete with graded jhama khoa (30 mm size) excluding shuttering in ground floor and foundation. (a) 1:3:6 proportion. PWD Building Works schedule, Page -23, Item -B.1.a, Corri. Page-09, Date-04-06-2018) Rate Analysis | | | | | | | 9.02 | 5529.60 | Cum | 49876.99 |
| | Column | | 4 | 1.200 | 1.2 | 0.1 | 0.580 | | | | |
| | Tie Beam | | 1 | 18.175 | 0.25 | 0.25 | 1.140 | | | | |
| | Floor 1 | | 2 | 4.6 | 2.325 | 0.1 | 2.140 | | | | |
| | Platform | | 1 | 17.3 | 1.2 | 0.1 | 2.080 | | | | |
| | Ramp | | 1 | 2.75 | 1.2 | 0.1 | 0.330 | | | | |
| | Open Space | | 1 | 17.3 | 1.5 | 0.1 | 2.600 | | | | |
| | Front Stair | | 2 | 1.5 | 0.5 | 0.1 | 0.150 | | | | |
| | | | | | | | 9.020 | | | | |
| 5 | 25mm. thick damp proof course with cement concrete with stone chips (1:1.5:3) [with graded stone aggregate 10 mm nominal size] and admixture of water proofing compound as per manufacturer's specification followed by two coat of polymer based paint, (1st coat after 4 to 5 days of concrete laying and 2 nd coat just before brick masonry work) as directed (cost of water proofing compound & polymer based paint to be paid separately).(Chequering not required over concrete or painted surface). [Note: - Waterproofing as per item 9, polymer based paint as per item 8 (a) of subhead C of Section (C). PWD Building Works schedule, Page -47, Item -1 (Rate Analysis) | | | | | | | 4.83 | 351.56 | Sqm | 1698.03 |
| | | | 1 | 18.175 | 0.25 | | 4.540 | | | | |
| | | | 1 | 2.3 | 0.125 | | 0.290 | | | | |
| | | | | | | | 4.830 | | | | |

| | | | | | | |
|----|---|-------|-----------|-------|----------|--------|
| 6 | Brick work with 1st class bricks in cement mortar (1:4) (a) In foundation and plinth PWD Building Works schedule, Page -15, Item-7.a (Rate Analysis) | 3.43 | 7992.64 | Cum | 27414.76 | |
| | GL 2 PL | 1 | 18.175 | 0.250 | 0.600 | 2.730 |
| | Ramp | 1 | 2.75 | 0.250 | 0.225 | 0.150 |
| | Platform | 1 | 3.9 | 0.250 | 0.450 | 0.440 |
| | Front Stair | 1 | 1.5 | 0.25 | 0.3 | 0.110 |
| | | | | | | 3.430 |
| 7 | Brick work with 1st class bricks in cement mortar (1:4) (b) In superstructure, ground floor PWD Building Works schedule, Page -15, Item-7.b (Rate Analysis) | 9.97 | 8260.24 | Cum | 82354.59 | |
| | Outer Wall | 1 | 18.175 | 0.25 | 2.575 | 11.700 |
| | Less Door | -2 | 1.2 | 0.25 | 2.1 | -1.260 |
| | Less Window | -7 | 0.6 | 0.25 | 0.45 | -0.470 |
| | | | | | | 9.970 |
| 8 | 125 mm. thick brick work with 1st class bricks in cement mortar (1:4) in ground floor. PWD Building Works schedule, Page - 16, Item - 16 (Corri. Page-03, Date-04-06-2018) (Rate Analysis) | 18.38 | 1030.27 | Sqm | 18936.36 | |
| | Wall | 1 | 5 | | 2.75 | 13.750 |
| | Less Door | -2 | 1 | | 2.1 | -4.200 |
| | Spring | 1 | 15.350 | | 0.125 | 1.920 |
| | Parapet | 1 | 15.350 | | 0.45 | 6.910 |
| | | | | | | 18.380 |
| 9 | Earth work in filling in foundation trenches or plinth with good earth, in layers not exceeding 150 mm. including watering and ramming etc. layer by layer complete. (Payment to be made on the basis of measurement of finished quantity of work). (a) With earth obtained from excavation of foundation. PWD Building Works schedule, Page - 1, Item -3.a | 6.84 | 7754.00 | %Cum | 530.37 | |
| | 2/3rd of Earth work | | 0.66 | 10.37 | | 6.84 |
| 10 | (A) Filling in foundation or plinth by silver sand in layers not exceeding 150 mm as directed and consolidating the same by thorough saturation with water, ramming complete including the cost of supply of sand. (payment to be made on measurement of finished quantity) PWD Building Works schedule, Page - 2, Item -4.a | 9.27 | 311767.60 | %Cum | 19630.86 | |
| | | 1 | 4.6 | 4.05 | 0.45 | 8.38 |
| | Ramp | 1 | 2.75 | 0.75 | 0.225 | 0.46 |
| | Platform | 1 | 1 | 0.95 | 0.45 | 0.43 |
| | | | | | | 9.27 |
| 11 | Hire and labour charges for shuttering with centering and necessary staging upto 4 m using approved stout props and thick hard wood planks of approved thickness with required bracing for concrete slabs, beams and columns, lintels curved or straight including fitting, fixing and striking out after completion of works (upto roof of ground floor) (f) 25 mm to 30 mm shuttering without staging in foundation PWD Building Works schedule, Page -42, Item- 36.f | 18.59 | 250.80 | Sqm | 4662.37 | |
| | Foundation | 16 | 1.20 | | 0.15 | 2.88 |
| | Tie Beam | 2 | 19.3 | | 0.3 | 11.58 |
| | Coumn | 16 | 0.3 | | 0.725 | 3.48 |
| | Ramp | 1 | 2.75 | | 0.125 | 0.34 |
| | Platform | 1 | 2.5 | | 0.125 | 0.31 |
| | | | | | | 18.590 |

| Year | Month | Day | Time | Location | Activity | Remarks |
|------|-------|-----|-------|----------|----------|---------|
| 1950 | Jan | 1 | 08:00 | ... | ... | ... |
| 1950 | Jan | 2 | 08:00 | ... | ... | ... |
| 1950 | Jan | 3 | 08:00 | ... | ... | ... |
| 1950 | Jan | 4 | 08:00 | ... | ... | ... |
| 1950 | Jan | 5 | 08:00 | ... | ... | ... |
| 1950 | Jan | 6 | 08:00 | ... | ... | ... |
| 1950 | Jan | 7 | 08:00 | ... | ... | ... |
| 1950 | Jan | 8 | 08:00 | ... | ... | ... |
| 1950 | Jan | 9 | 08:00 | ... | ... | ... |
| 1950 | Jan | 10 | 08:00 | ... | ... | ... |
| 1950 | Jan | 11 | 08:00 | ... | ... | ... |
| 1950 | Jan | 12 | 08:00 | ... | ... | ... |
| 1950 | Jan | 13 | 08:00 | ... | ... | ... |
| 1950 | Jan | 14 | 08:00 | ... | ... | ... |
| 1950 | Jan | 15 | 08:00 | ... | ... | ... |
| 1950 | Jan | 16 | 08:00 | ... | ... | ... |
| 1950 | Jan | 17 | 08:00 | ... | ... | ... |
| 1950 | Jan | 18 | 08:00 | ... | ... | ... |
| 1950 | Jan | 19 | 08:00 | ... | ... | ... |
| 1950 | Jan | 20 | 08:00 | ... | ... | ... |
| 1950 | Jan | 21 | 08:00 | ... | ... | ... |
| 1950 | Jan | 22 | 08:00 | ... | ... | ... |
| 1950 | Jan | 23 | 08:00 | ... | ... | ... |
| 1950 | Jan | 24 | 08:00 | ... | ... | ... |
| 1950 | Jan | 25 | 08:00 | ... | ... | ... |
| 1950 | Jan | 26 | 08:00 | ... | ... | ... |
| 1950 | Jan | 27 | 08:00 | ... | ... | ... |
| 1950 | Jan | 28 | 08:00 | ... | ... | ... |
| 1950 | Jan | 29 | 08:00 | ... | ... | ... |
| 1950 | Jan | 30 | 08:00 | ... | ... | ... |
| 1950 | Jan | 31 | 08:00 | ... | ... | ... |
| 1950 | Feb | 1 | 08:00 | ... | ... | ... |
| 1950 | Feb | 2 | 08:00 | ... | ... | ... |
| 1950 | Feb | 3 | 08:00 | ... | ... | ... |
| 1950 | Feb | 4 | 08:00 | ... | ... | ... |
| 1950 | Feb | 5 | 08:00 | ... | ... | ... |
| 1950 | Feb | 6 | 08:00 | ... | ... | ... |
| 1950 | Feb | 7 | 08:00 | ... | ... | ... |
| 1950 | Feb | 8 | 08:00 | ... | ... | ... |
| 1950 | Feb | 9 | 08:00 | ... | ... | ... |
| 1950 | Feb | 10 | 08:00 | ... | ... | ... |
| 1950 | Feb | 11 | 08:00 | ... | ... | ... |
| 1950 | Feb | 12 | 08:00 | ... | ... | ... |
| 1950 | Feb | 13 | 08:00 | ... | ... | ... |
| 1950 | Feb | 14 | 08:00 | ... | ... | ... |
| 1950 | Feb | 15 | 08:00 | ... | ... | ... |
| 1950 | Feb | 16 | 08:00 | ... | ... | ... |
| 1950 | Feb | 17 | 08:00 | ... | ... | ... |
| 1950 | Feb | 18 | 08:00 | ... | ... | ... |
| 1950 | Feb | 19 | 08:00 | ... | ... | ... |
| 1950 | Feb | 20 | 08:00 | ... | ... | ... |
| 1950 | Feb | 21 | 08:00 | ... | ... | ... |
| 1950 | Feb | 22 | 08:00 | ... | ... | ... |
| 1950 | Feb | 23 | 08:00 | ... | ... | ... |
| 1950 | Feb | 24 | 08:00 | ... | ... | ... |
| 1950 | Feb | 25 | 08:00 | ... | ... | ... |
| 1950 | Feb | 26 | 08:00 | ... | ... | ... |
| 1950 | Feb | 27 | 08:00 | ... | ... | ... |
| 1950 | Feb | 28 | 08:00 | ... | ... | ... |
| 1950 | Feb | 29 | 08:00 | ... | ... | ... |
| 1950 | Mar | 1 | 08:00 | ... | ... | ... |
| 1950 | Mar | 2 | 08:00 | ... | ... | ... |
| 1950 | Mar | 3 | 08:00 | ... | ... | ... |
| 1950 | Mar | 4 | 08:00 | ... | ... | ... |
| 1950 | Mar | 5 | 08:00 | ... | ... | ... |
| 1950 | Mar | 6 | 08:00 | ... | ... | ... |
| 1950 | Mar | 7 | 08:00 | ... | ... | ... |
| 1950 | Mar | 8 | 08:00 | ... | ... | ... |
| 1950 | Mar | 9 | 08:00 | ... | ... | ... |
| 1950 | Mar | 10 | 08:00 | ... | ... | ... |
| 1950 | Mar | 11 | 08:00 | ... | ... | ... |
| 1950 | Mar | 12 | 08:00 | ... | ... | ... |
| 1950 | Mar | 13 | 08:00 | ... | ... | ... |
| 1950 | Mar | 14 | 08:00 | ... | ... | ... |
| 1950 | Mar | 15 | 08:00 | ... | ... | ... |
| 1950 | Mar | 16 | 08:00 | ... | ... | ... |
| 1950 | Mar | 17 | 08:00 | ... | ... | ... |
| 1950 | Mar | 18 | 08:00 | ... | ... | ... |
| 1950 | Mar | 19 | 08:00 | ... | ... | ... |
| 1950 | Mar | 20 | 08:00 | ... | ... | ... |
| 1950 | Mar | 21 | 08:00 | ... | ... | ... |
| 1950 | Mar | 22 | 08:00 | ... | ... | ... |
| 1950 | Mar | 23 | 08:00 | ... | ... | ... |
| 1950 | Mar | 24 | 08:00 | ... | ... | ... |
| 1950 | Mar | 25 | 08:00 | ... | ... | ... |
| 1950 | Mar | 26 | 08:00 | ... | ... | ... |
| 1950 | Mar | 27 | 08:00 | ... | ... | ... |
| 1950 | Mar | 28 | 08:00 | ... | ... | ... |
| 1950 | Mar | 29 | 08:00 | ... | ... | ... |
| 1950 | Mar | 30 | 08:00 | ... | ... | ... |
| 1950 | Mar | 31 | 08:00 | ... | ... | ... |

| | | | | | |
|----|--|-------|----------|-------|--------------|
| 12 | Hire and labour charges for shuttering with centering and necessary staging upto 4 m using approved stout props and thick hard wood planks of approved thickness with required bracing for concrete slabs, beams and columns, lintels curved or straight including fitting, fixing and striking out after completion of works (upto roof of ground floor) (a) 25 mm to 30 mm thick wooden shuttering as per decision & direction of Engineer-In-Charge. PWD Building Works schedule, Page -42, Item- 36.a | 59.33 | 400.80 | Sqm | 23779.46 |
| | Column | 16 | 0.25 | | 2.575 10.300 |
| | Roof Beam | 1 | 19.3 | | 0.300 5.790 |
| | Roof Beam | 1 | 36.35 | | 0.175 6.360 |
| | Lintel | 2 | 40.15 | | 0.2 16.060 |
| | Lintel btm | 2 | 1.500 | | 0.25 0.750 |
| | | 2 | 1.500 | | 0.125 0.380 |
| | Chajja | 1 | 7.800 | 0.3 | 2.340 |
| | | 1 | 23.100 | | 0.075 1.730 |
| | slab with b btm | 1 | 4.850 | 2.825 | 13.700 |
| | Slab Side | 1 | 15.350 | | 0.125 1.920 |
| | | | | | 59.330 |
| 13 | Ordinary Cement concrete (mix 1:1.5:3) with graded stone chips (20 mm nominal size) excluding shuttering and reinforcement,if any, in ground floor as per relevant IS codes. a) Pakur Variety /Chandil Variety PWD Building Works schedule, p-26 Item 10 a (Rate Analysis) | 7.42 | 7898.46 | Cum | 58582.88 |
| | Colm foot | 4 | 1.2 | 1.2 | 0.15 0.860 |
| | $4*0.15/3*(1*1+0.3*0.3+1*0.3)=0.417$ | | | | 0.417 |
| | Tool Column | 4 | 0.3 | 0.3 | 0.425 0.150 |
| | Column | 4 | 0.25 | 0.25 | 3.025 0.760 |
| | Tie Beam | 1 | 18.175 | 0.25 | 0.25 1.140 |
| | Lintel | 1 | 5 | 0.125 | 0.2 0.130 |
| | | 1 | 18.175 | 0.25 | 0.2 0.910 |
| | Chajja | 1 | 14.100 | 0.3 | 0.075 0.320 |
| | Slab Beam | 1 | 18.175 | 0.25 | 0.175 0.800 |
| | Slab | 1 | 4.850 | 2.825 | 0.125 1.710 |
| | Wash Basin | 2 | 2.400 | 0.6 | 0.075 0.220 |
| | | | | | 7.417 |
| 14 | Reinforcement for reinforced concrete work in all sorts of structures including distribution bars, stirrups, binders etc initial straightening and removal of loose rust (if necessary), cutting to requisite length, hooking and bending to correct shape, placing in proper position and binding with 16 gauge black annealed wire at every intersection, complete as per drawing and direction. (a) For works in foundation and upto roof of ground floor/upto 4 m. (i) Tor steel/Mild Steel , JSPL/SWAYN/ELETRO/STEEL PWD Building Works schedule, Page - 43, Item - 40.a.i.1(Corri. 10th Page-01, Date-23-01-2020) (Rate Analysis) | 0.728 | 71722.88 | M.T. | 52214.26 |
| | | 7.417 | 0.0125 | 7.85 | |
| | | | | | 0.728 |
| 15 | Artificial stone in floor, dado, staircase etc with cement concrete (1:2:4) with stone chips, laid in panels as directed with topping made with ordinary or white cement (as necessary) and marble dust in proportion (1:2) including smooth finishing and rounding off corners including raking out joints or roughening of concrete surface and application of cement slurry before flooring..... 25 mm. thick For roofing PWD Building Works schedule, P-48, It-6.ii (Rate Analysis) | 13.70 | 340.77 | Sqm | 4668.55 |
| | roof | 1 | 4.850 | 2.825 | 13.700 |
| | | | | | 13.700 |
| 16 | Neat cement punning about 1.5mm thick in wall, dado, window sill, floor etc. NOTE:Cement 0.152 cu.m per100 sq.m. PWD Building Works schedule, P-192, It. No. 15 (Rate Analysis) | 8.69 | 39.52 | Sqm | 343.43 |

| | | | | | | | | | | | |
|----|---|--|----|--------|-------|------|-------|---------|---------|------|----------|
| | Below Plinth | | 1 | 19.300 | | 0.45 | 8.690 | | | | |
| | | | | | | | 8.690 | | | | |
| 17 | Labour for Chipping of concrete surface before taking up Plastering work. Building Works schedule, P-192, It-1 | | | | | | PWD | 59.33 | 21.00 | Sqm | 1245.93 |
| | Same as shuttering sl no. 12 | | | | 59.33 | | | | | | |
| 18 | Plaster (to wall, floor, ceiling etc.) with sand and cement mortar including rounding off or chamfering corners as directed and raking out joints including throating, nosing and drip course, scaffolding/staging where necessary (Ground floor). [Excluding cost of chipping over concrete surface] (i) With 1:6 cement mortar (c) 15 mm thick plaster PWD Building Works schedule, P-189 It- No. 1 (Rate Analysis) | | | | | | | 167.67 | 189.46 | Sqm | 31766.76 |
| | Back side | | 1 | 4.850 | | | 2.875 | 13.940 | | | |
| | Outer wall | | 2 | 10.500 | | | 2.875 | 60.380 | | | |
| | Chajja | | 1 | 14.100 | | | 0.925 | 13.040 | | | |
| | Chajja Side | | 30 | 0.300 | | | 0.075 | 0.680 | | | |
| | Iner Wall | | 1 | 18.2 | | | 2.875 | 52.330 | | | |
| | Less Door | | -2 | 1 | | | 2.1 | -4.200 | | | |
| | Spring | | 1 | 37.5 | | | 0.325 | 12.190 | | | |
| | Parapet wall | | 1 | 19.8 | | | 0.975 | 19.310 | | | |
| | | | | | | | | 167.670 | | | |
| 19 | Plaster (to wall, floor, ceiling etc.) with sand and cement mortar including rounding off or chamfering corners as directed and raking out joints including throating, nosing and drip course, scaffolding/staging where necessary (Ground floor). [Excluding cost of chipping over concrete surface] (ii) With 1:4 cement mortar (c) 10 mm thick plaster PWD Building Works schedule, P-189 It- No. 1 (ii)(c) (Rate Analysis) | | | | | | | 13.70 | 165.26 | Sqm | 2264.06 |
| | Slab bottom | | 1 | 4.85 | 2.825 | | | 13.700 | | | |
| | | | | | | | | | | | |
| 20 | Supplying, fitting and fixing fibre reinforced polymer (FRP) Composite door frame as per approved section with glass fibre reinforced plastic moulded skins and a special sandwich core, so as to impart monolitaheic composite structure as per approved technology of Department of Science and Technology (DST) to satisfy IS: 4020 door testing performance criteria.. (i) 66mm x 90mm PWD Building Works schedule, P-115, It - 3 (i) | | | | | | | 9.30 | 624.00 | Mtr | 5803.20 |
| | | | 2 | 4.65 | | | | 9.300 | | | |
| | | | | | | | | 9.300 | | | |
| 21 | Supplying, fitting & fixing fibre reinforced polymer (FRP) Composite door shutters as per approved design with glass fibre reinforced plastic moulded skins and a special sandwich core, so as to impart monolitaheic composite structure as per approved technology of Department of Science and Technology (DST) to satisfy IS:4020 door testing performance criteria. In ground floor. P-125, It- 14(ii) | | | | | | | 2.45 | 3241.20 | Sqm | 7940.94 |
| | | | 2 | 1.884 | 0.65 | | | 2.450 | | | |
| | | | | | | | | 2.450 | | | |
| 22 | Anodised aluminium barrel / tower / socket bolt (full covered) of approved manufactured from extruded section conforming to I.S. 204/74 fitted and fixed with cadmium plated screws . (vii) 225mm long x 10mm dia. bolt. PWD Building Works schedule, P-144, It No. 26 (vii) | | | | | | | 4.00 | 102.00 | Each | 408.00 |
| | | | 2 | 2.00 | | | | 4.000 | | | |

| | | | | | |
|----|---|--------|---------|--------|-----------|
| 23 | Iron butt hinges of approved quality fitted and fixed with steel screws, with ISI mark. (viii) 100mm X 75mm X 3.50mm. PWD Building Works schedule, P-140, It No. -5 (viii) | 6.00 | 79.20 | Each | 475.20 |
| | | 2 | 3.00 | | 6.000 |
| 24 | Anodised aluminium decorative handle (hexagonal / fluted) of approved quality fitted and fixed complete. (i) 150mm plate x 10mm dia rod x 12mm hexagonal/fluted. PWD Building Works schedule, Page -146 . Item no-31,(i) | 4.00 | 130.80 | Each | 523.20 |
| | | 2 | 2.00 | | 4.000 |
| 25 | Iron hasp bolt of approved quality fitted and fixed complete (oxidised) with 16mm dia rod with concrete bolt and round fitting. .b)250mm long. PWD Building Works schedule, Page -141 . Item no-10 b) | 2.00 | 195.60 | Each | 391.20 |
| | | 2 | 1.00 | | 2.000 |
| 26 | (A) Supplying Aluminium casted body hydraulic door closer as per I.S.I. SOR, PWD, P- 244, I - 13(a) | 4.00 | 635.00 | Each | 2540.00 |
| | | 4 | 1.00 | | 4.000 |
| 27 | Rendering the Surface of walls and ceiling with White Cement base WATER PROOF wall putty of approved make & brand.(1.5 mm thick) In Ground Floor PWD Building Works schedule, PWD, P- 198, I - 5 | 175.43 | 146.40 | Sqm | 25682.95 |
| | Same as Plaster Item - Plinth plaster | | | 175.43 | |
| 28 | (b) Priming one coat on timber or plastered surface with synthetic oil bound primer of approved quality including smoothening surfaces by sand papering etc. PWD Building Works schedule, Page -200 . Item no- 1 (b) | 175.43 | 45.60 | Sqm | 7999.61 |
| | Same as Plaster Item - Plinth plaster | | | 175.43 | |
| 29 | (A) Painting with best quality synthetic enamel paint of approved make and brand including smoothening surface by sand papering etc. including using of approved putty etc. on the surface, if necessary : Page -200 . Item no- 1 (b) (a) On timber or plastered surface : With super gloss (hi-gloss) - (iv) Two coats (with any shade except white) PWD Building Works schedule, Page -200 . Item no- 2(A)(a)(iv) | 175.43 | 98.40 | Sqm | 17262.31 |
| | Same as Plaster Item - Plinth plaster | | | 175.43 | |
| 30 | Collapsible gate with 40mm x 40mm x 6mm Tee as top and bottom guide rail, 20mm x 10mm x 2mm vertical channels 100mm apart in fully stretched position 20mm x 5mm M.S. flats as collapsible bracings properly rivetted and washered including 38mm steel rollers including locking arrangements, fitted and fixed in position with lugs set in cement concrete and including cutting necessary holes, chasing etc. in walls, floors etc. and making good damages complete. In ground floor. P-106 Item-18 (3rd Corrigendam Page No 92) | 4.62 | 5271.60 | Sqm | 24354.79 |
| | gate | 1 | 1.20 | | 2.10 2.52 |
| | | 1 | 1 | | 2.1 2.10 |
| | | | | | 4.620 |

| | | | | | | | | | | |
|----|---|---|---|-------|-------|------|--------|----------|------|----------|
| 31 | (a) M.S.or W.I. Ornamental grill of approved design joints continuously welded with M.S, W.I. Flats and bars of windows, railing etc. fitted and fixed with necessary screws and lugs in ground floor. (i) Grill weighing above 10 Kg./sq.mtr and up to 16 Kg./sq. mtr. PWD Building Works schedule, P-104 Item-13 A (i) (3rd Corrigendam Page No 91) | | | | | | 4.36 | 12343.20 | Qntl | 53816.35 |
| | Grill | | 7 | 0.60 | 0.45 | 0.16 | 0.300 | | | |
| | Boundary | | 1 | 27.00 | 0.9 | 0.16 | 3.890 | | | |
| | Box for pump | | 3 | 0.60 | 0.6 | 0.16 | 0.170 | | | |
| | | | | | | | 4.360 | | | |
| 32 | (ii) Grill weighing above 16 Kg./sq.mtr and above PWD Building Works schedule, P-104 Item-13 A (ii) (3rd Corrigendam Page No 91) | | | | | | 1.28 | 12111.60 | Qntl | 15502.85 |
| | Railing | | 1 | 4.75 | 0.9 | 0.30 | 1.280 | | | |
| | | | | | | | | | | |
| 33 | a) Priming one coat on steel or other metal surface with synthetic oil bound primer of approved quality including smoothening surfaces by sand papering etc. PWD Building Works schedule, P/200 Item-1(a) | | | | | | 73.41 | 36.00 | Sqm | 2642.76 |
| | gate | 2 | 1 | 1.20 | 2.10 | | 5.040 | | | |
| | | 2 | 1 | 1 | 2.10 | | 4.200 | | | |
| | Grill | 2 | 9 | 0.60 | 0.45 | | 4.860 | | | |
| | Boundary Partition | 2 | 1 | 27.00 | 0.9 | | 48.600 | | | |
| | Box for pump | 2 | 3 | 0.60 | 0.6 | | 2.160 | | | |
| | Railing | 2 | 1 | 4.75 | 0.9 | | 8.550 | | | |
| | | | | | | | 73.410 | | | |
| 34 | (A) Painting with best quality synthetic enamel paint of approved make and brand including smoothening surface by sand papering etc. including using of approved putty etc. on the surface, if necessary : (b) On steel or other metal surface : (iv) Two coats (with any shade except white) PWD Building Works schedule, P-200 Item-2(b)(iv) | | | | | | 73.41 | 96.00 | Sqm | 7047.36 |
| | Same as primeing on grill | | | | | | 73.41 | | | |
| | | | | | | | | | | |
| 35 | Supplying and laying true to line and level vitrified tiles of approved brand (size not less than 600 mm X 600 mm X 10 mm thick) in floor, skirting etc. set in 20 mm sand cement mortar (1:4) and 2 mm thick cement slurry back side of tiles using cement @ 2.91Kg./sqM or using polymerised adhesive (6 mm thick layer applied directly over finished artificial stone floor/Mosaic etc without any backing course) laid after application slurry using 1.75 Kg of cement per sqM below mortar only, joints grouted with admixture of white cement and colouring Pigment to match with colour of tiles / epoxy grout materials of approved make as directed and removal of wax coating of top surface of tiles with warm water and polishing the tiles using soft and dry cloth upto mirror finish complete including the cost of materials, labour and all other incidental charges complete true to the manufacturer's specification and direction of Engineer-in-Charge. (White cement, synthetic adhesive and grout material to be supplied by the contrr]e) I (I) With application slurry @1.75 kg/ Sq.m, 20 mm sand cement mortar (1:4) & 2 mm thick cement slurry at back side of tiles, 0.2 kg/ Sq.m white cement for joint filling with pigment. (A) Deep Colour & White PWD Building Works schedule, Page-66 Item-36 (A) (3rd Corrigendam, Page -36) | | | | | | 14.32 | 2055.60 | Sqm | 29436.19 |
| | floor | | 1 | 4.85 | 2.825 | | 13.700 | | | |
| | Door Gap | | 2 | 0.75 | 0.125 | | 0.190 | | | |
| | | | 1 | 1 | 0.125 | | 0.130 | | | |
| | | | 1 | 1.2 | 0.25 | | 0.300 | | | |
| | | | | | | | 14.320 | | | |

| | | | | | |
|----|--|-------|---------|-------|-----------|
| 36 | <p>Supplying, fitting & fixing 1st quality Ceramic tiles in walls and floors to match with the existing work & 4 nos. of key stones (10mm) fixed with araldite at the back of each tile & finishing the joints with white cement mixed with colouring oxide if required to match the colour of tiles including roughening of concrete surface, if necessary or by synthetic adhesive & grout materials etc.</p> <p>B) Wall of each tile above 0.09 Sq.m Coloured decorative including white Works schedule, page-64, Item:35.(B.) (b).(ii) Page 36)</p> <p style="text-align: right;">b) Area ii) Other than PWD Building (3rd Corrigendam Page 36)</p> | 85.87 | 1426.80 | Sqm | 122519.32 |
| | Out side | 1 | 10.5 | 1.5 | 15.750 |
| | Less Door | -1 | 1.2 | 2.1 | -2.520 |
| | Door frame side | 1 | 5.2 | 0.175 | 0.910 |
| | Inner | 1 | 61.8 | 1.5 | 92.700 |
| | Less Door | -4 | 0.75 | 1.95 | -5.850 |
| | | -1 | 1.2 | 2.1 | -2.520 |
| | | -6 | 1 | 2.1 | -12.600 |
| | | | | | |
| | | | | | 85.870 |
| 37 | <p>a) 25 mm thick Tiles as per IS: 1237-2012 for footpath,ramp,staircase of public building(over 25 mm thick (Avg) Cement mortar (1:3) & Cement Slurry @ 4.4 kg/Sq.m at back side of Block. Cement for Mortar & Slurry to be supplied by Department). (ii) Coloured Decorative PWD Building Works schedule, page-74, Item:48(a)-ii (3rd Corrigendam ,Page 37)</p> | 45.19 | 1086.00 | Sqm | 49076.34 |
| | Open Space | 1 | 25 | 1.5 | 37.500 |
| | Ramp | 1 | 2.75 | 1.2 | 3.300 |
| | | 1 | 2.75 | 0.225 | 0.620 |
| | Platform | 1 | 1.95 | 1.2 | 2.340 |
| | Stair | 1 | 1.5 | 0.95 | 1.430 |
| | | | | | 45.190 |
| 38 | <p>Supplying, fitting & fixing granite slabs 15mm to 18 mm. thick with uniform texture & without decorative veins in columns, wall, facia, rise etc. with 15 mm thick [avg] cement mortar (1:2) including making suitable arrangements to hold the stones properly by brass / copper hooks including pointing in cement mortar (1:2) (1 white cement : 2 marble dust) with admixture of pigment matching the stone shades all complete as per direction of the Engineer-in-charge including cost of all materials, labours, scaffolding, staging, curing and roughening of concrete surface complete. [Using cement slurry at back side of granite @ 4.4 kg/sq.m & white cement slurry for joint filling @ 1.8 kg/sq.m] In ground floor each Granite slab 0.6 to 1.0 Square meter. PWD Building Works schedule, page-63, Item:33(a)- (3rd Corrigendam ,Page 37)</p> <p style="text-align: right;">(a) Area of</p> | 3.83 | 4419.60 | Sqm | 16927.07 |
| | For Wash Basin | 2 | 2.55 | 0.75 | 3.830 |
| 39 | <p>Supplying, fitting and fixing 18 mm thick marble partition slab with chawk doongri marbel square cut, both sides polished with two front corners rounded and edges polished. Sanitary and plumbing work schedule P-81, It-13</p> | 0.72 | 1711.20 | Sqm | 1232.06 |
| | | 1 | 1.2 | 0.6 | 0.72 |
| 40 | <p>Supplying profiles of required section made of Aluminium Alloy Extrusions conforming to IS: 732-1983 and IS: 1285- 1975; Anodized (with required film thickness and specified colour / natural) matt finished conforming to IS: 1868-1983 for fabrication of composit door, sliding & casement windows, partitions, formed of basic sections of any ISI embossed / certified make and brand as per direction of Engineer - In-Charge. (Payment will be made on finished length of the work). (A) In 10-12 Micron thickness Anodizing film Natural white h) Louvered window. Top, bottom and side member. PWD Building Works schedule, PWD, P-233, I- 1(h) i</p> <p style="text-align: right;">i)</p> | 14.70 | 229.20 | M | 3369.24 |

| | | | | | | | | | | | |
|----|---|--|----|------|------|--|---------|---------|--------|----------|----------|
| | | | 7 | 2.1 | | | 14.700 | | | | |
| 41 | ii) Louvered Section. | | | | | | | 12.60 | 820.80 | M | 10342.08 |
| | | | 21 | 0.6 | | | 12.600 | | | | |
| 42 | iii) Cleat angle (Non-annodized). | | | | | | | 11.34 | 328.80 | M | 3728.59 |
| | | | 21 | 0.54 | | | 11.3400 | | | | |
| 43 | Labour charge for fabrication and installation of composite door, window, partitions made from annodized extruded alloy aluminium sections for the following units:- (A) Glazed aluminium sliding windows made of extruded and annodized alloy aluminium sections, fabrications, including cutting to proper shape and size, drilling and aligning of window shutter frame fitted with in built locking arrangements, sliding rollers and other necessary fittings, fixture, adhesives and joineries along with extruded neoprene or EPDM gasketing in between window frame and masonry work (walls, column, beam.lintels etc.) as well as between glass and shutter frame for fixing glass and Polysulphide sealant and in between shutter and window frame where necessary including cutting to requisite size and fixing glass as per drawing, specification and direction of EIC. The rate includes the hire charge of all tools and plants, including all incidental charges, adhesive, joineries such as screw, cleat angle etc. but excluding the cost of extruded aluminium sections, glass, neoprene / EPDM gasket, locking arrangement and rollers. v) Louvered window. | | | | | | 1.89 | 730.00 | Sqm | 1379.70 | |
| | | | 7 | 0.6 | 0.45 | | 1.890 | | | | |
| 44 | Supplying bubble free float glass of approved make and brand conforming to IS: 2835-1987. iv) 5mm thick coloured / tinted / smoke glass. PWD Building Works schedule, P-243, I-9 | | | | | | 1.89 | 702.00 | Sq.M. | 1326.78 | |
| | | | 7 | 0.6 | 0.45 | | 1.890 | | | | |
| 45 | Painting block letters or digits in Black Japan or any approved paint as per direction. Size above 7.5 cm. and upto 10 cm. Building Works schedule, P-268, It-17(e) e) PWD | | | | | | 650.00 | 14.40 | Each | 9360.00 | |
| 46 | Supply and Fixing of 2 mm Polyvinyl glow sign board made of 22 SWG GI sheet box with 1"X1" aluminum channel for fixing the vinyl board after necessary cutting the letter as required & s\ LED tube light fittings along with all accessories UDMA Electrical shdule P-14, It NO. 4 | | | | | | 15.00 | 495.00 | Sq.F. | 7425.00 | |
| | | | 1 | 5 | 3 | | 15 | | | | |
| 47 | Supplying and Planting of different plant / trees (Supplying well grown plants bushy and healthy, minimum height as specified i.e. exposed height including all leads & lift, carriage, handling, manuring, applying presticide and fertilizer etc. . i) Furcaria veriegated 10-12 leaves in height 20-30cm in earthen pots of size 25cm. PWD Building Works schedule, Page -261, It- 9 (i) | | | | | | 12 | 194.40 | Each | 2332.80 | |
| 48 | x) Ficus blakii (F. Vivicon) well branched (Bushy) of height 120cm - 135 cm in earthen pot of size 30cm. PWD Building Works schedule, Page -261, It- 9 (x) | | | | | | 9 | 224.40 | Each | 2019.60 | |
| 49 | xxvi) Areca Palm 4 - 5 suckers of height 90 cm to 105 cm in earthen pots of size 25 cm. PWD Building Works schedule, Page -261, It- 9 (xxvi) | | | | | | 6 | 152.40 | Each | 914.40 | |
| 50 | Supplying, fitting and fixing Anglo-Indian W.C. in white glazed vitreous china ware of approved make complete in position with necessary bolts, nuts etc. a) With 'P' trap (with vent) S&P Schedule, page-79, item no -3 (a) PWD | | | | | | 4 | 4097.28 | Each | 16389.12 | |

| | | | | | | |
|----|--|-----|---|---------|------|---------|
| 51 | Supplying, fitting and fixing Closet seat of approved make with lid and C.P. hinges, rubber buffer and brass screws complete .(b) Anglo Indian (i) Plastic (hallow type) White S&P Schedule, page-81,item no 10.b.i | PWD | 2 | 501.60 | Each | 1003.20 |
| 52 | Supplying, fitting and fixing Shallow water closet Indian pattern (I.P.W.C.) of approved make in white vitreous chinaware in position (excluding cost of concrete for fixing). (i) 580 mm long PWD S&P Schedule, page-79,item no -1 (i) | | 2 | 1167.60 | Each | 2335.20 |
| 53 | Supplying, fitting and fixing Flat back urinal (half stall urinal) in white vitreous chinaware of approved make in position with brass screws on 75 mm X 75 mm X 75 mm wooden blocks complete (ii) 470 mm X 280 mm X 340 mm PWD S&P Schedule, page.80,item no-6/(ii) | | 2 | 1247.40 | Each | 2494.80 |
| 54 | Supplying, fitting and fixing Squating plate with integral flushing in white vitreous chinaware of approved make in cement concrete (6:3:1) with jhama chips complete. (Payment of concrete will be paid seperately). (i) 450 mm X 350 mm PWD S&P Schedule. (P - 80. Item. No. - 7 . | | 1 | 1057.20 | Each | 1057.20 |
| 55 | Supplying, fitting and fixing 10 litre P.V.C. low-down cistern conforming to I.S. specification with P.V.C. fittings complete,C.I. brackets including two coats of painting to bracket etc. PWD S&P Schedule, Page No.-36 Item No.-2, | | 2 | 1339.80 | Nos | 2679.60 |
| 56 | Supplying,fitting and fixing 32 mm dia. Flush Pipe of approved make with necessary fixing materials and clamps complete. i) Polythene Flush Pipe PWD S&P Schedule, Page no 81. Item no. 11(i) | | 4 | 204.60 | Each | 818.40 |
| 57 | Supplying, fitting and fixing urinal flush pipe fittings of approved brand. (a) C.P. urinal flush pipe fittings range of one PWD S&P Schedule, S.P.81,item-12/a | | 2 | 546.48 | Each | 1092.96 |
| 58 | Supplying, fitting and fixing white vitreous china best quality approved make wash basin with C.I. brackets on 75 mm X 75 mm wooden blocks, C.P. waste fittings of 32 mm dia., mending good all damages and painting the brackets with two coats of approved paint. (ii) 550 mm X 400 mm size PWD S&P Schedule, P-41, It 2 (ii) | | 2 | 2914.56 | Each | 5829.12 |
| 59 | Supplying,fitting and fixing approved brand P.V.C. CONNECTOR white flexible, with both ends coupling with heavy brass C.P. nut, 15 mm dia., (iii) 600 mm long PWD S&P Schedule, Page No.-43 Item No.-9-iii PWD, | | 7 | 141.24 | Each | 988.68 |
| 60 | Supplying,fitting and fixing approved brand 32 mm dia.P.V.C. waste pipe, with PVC coupling at one end fitted with necessary clamps. (iv) 1050 mm long each PWD S&P Schedule, Page No.-43 Item No. 10-iv | | 7 | 120.12 | Each | 840.84 |
| 61 | (f) Hand Shower(Health Faucet) with 1mtr Flexible Tube with Wall Hook(Equivalent to Code No.573 & Model -ALLIED of Jaquar or similar). PWD S&P Schedule, Page No.-3 Item No.- 3 f, | | 2 | 1651.32 | Each | 3302.64 |
| 62 | (a) (i) Chromium plated Bib Cock short body (Equivalent to Code No. 511 & Model - Tropical / Sumthing Special of ESSCO or similar brand). PWD S&P Schedule, Page No.-6 Item No.-7-a-i | | 6 | 711.28 | Each | 4267.68 |
| 63 | (b) (i) Chromium plated Stop Cock (Equivalent to Code No. 513(A) & 513(B) & Model - Tropical / Sumthing Special of ESSCO or similar PWD S&P Schedule, Page No.-6 Item No.-7-b-i | | 6 | 650.76 | Each | 3904.56 |

| | | | | | |
|----|--|----|---------|------|----------|
| 64 | Supplying, fitting and fixing shower of approved brand and make. (ii) Chromium plated round shower with revolving joint (Equivalent to Code No. 541(N) & Model - Tropical / Sumthing Special of ESSCO or similar brand). PWD S&P Schedule, Page No.-3 Item No.-3- a-ii | 2 | 432.00 | Each | 864.00 |
| 65 | (iii) Chromium plated shower arm 240 mm long (Equivalent to Code No. 536(A) & Model - Tropical / Sumthing Special of ESSCO or similar brand). Page No.-3 Item No.-3-a-(iii), PWD,VOL-II , 2017-18 | 2 | 309.00 | Each | 618.00 |
| 66 | Chromium plated angular Stop Cock with wall flange (Equivalent to Code No. 5053 & Model - Florentine of Jaquar or similar brand). PWD S&P Schedule, Page No.-6 Item No.-7-d-i, | 5 | 1075.80 | Each | 5379.00 |
| 67 | Supplying, fitting and fixing pillar cock of approved make. a) (i) CP Pillar Cock - 15 mm. (Equivalent to Code No. 507 & Model - Tropical / Sumthing Special of ESSCO or similar brand). (P. No. - 45, Item. No. - 19(a)i, Pwd Sanitary Plumbing Schedule 2017) | 4 | 732.60 | Each | 2930.40 |
| 68 | Supplying, fitting and fixing PVC pipes of approved make of Schedule 80 (medium duty) conforming to ASTM D - 1785 and threaded to match with GI Pipes as per IS : 1239 (Part - I). with all necessary accessories, specials viz. socket, bend, tee, union, cross, elbo, nipple, longscrew, reducing socket, reducing tee, short piece etc. fitted with holder bats clamps, including cutting pipes, making threads,fitting, fixing etc. complete in all respect including cost of all necessary fittings as required, jointing materials and two coats of painting with approved paint in any position above ground. (Payment will be made on the centre line measurements of total pipe line including all specials. No separate payment will be made for accessories, specials. Payment for painting will be made seperately) (a) For Exposed Work Pipes, 25 mm No.-12 Item No.-19-i(a), PWD,VOL-II , 2017-18 | 25 | 233.64 | Mtr | 5841.00 |
| 69 | (a) (a) For Exposed Work Pipes, 15 mm No.-12 Item No.-19-i(a), PWD,VOL-II , 2017-18 | 10 | 133.32 | Mtr | 1333.20 |
| 70 | (b) For Concealed Work Pipes, 15 mm 12 Item No.-19-i(b), PWD,VOL-II , 2017-18 | 10 | 180.84 | Mtr | 1808.40 |
| 71 | Supplying and fitting fixing of gunmetal wheel valve of approved brand and make tested to 21 Kg per sq. cm. 25 mm dia(E5) PWD S&P Schedule, P-5 It-5,vii), | 2 | 1026.96 | Each | 2053.92 |
| 72 | Supplying P.V.C. water storage tank of approved quality with closed top with lid (Black) - Multilayer (b) 1000 litre capacity PWD S&P Schedule, page.37,item no-6 (b) | 2 | 6768.96 | Each | 13537.92 |
| 73 | Labour for hoisting plastic water storage tank. (i) Upto 1500 litre capacity. (a) Upto 1st story from G.L. PWD S&P Schedule, page.37,item no-10 (i)(a) | 2 | 96.00 | Each | 192.00 |
| 74 | Labour for punching hole in plastic water storage tank upto 50 mm dia. PWD S&P Schedule, (P. No. - 38, Item. No. - 13 | 4 | 19.00 | Each | 76.00 |
| 75 | Supply of UPVC pipes (B Type) & fittings conforming to IS-13592-1992.(A) (i) Single Socketed 3 Meter Length, (b) 110 mm PWD S&P Schedule, Page No.-68 Item No. 23,(A)(i)(b) | 30 | 385.44 | Mtr | 11563.20 |

| | | | | | |
|----|--|----|---------|--------|----------|
| 76 | (B) Fittings (i) Coupler, (b) 110 mm | 15 | 112.20 | Each | 1683.00 |
| 77 | (ii) Plain Tee, (b) 110 mm | 12 | 112.20 | Each | 1346.40 |
| 78 | (iii) Door Tee, (b) 110 mm | 9 | 257.40 | Each | 2316.60 |
| 79 | ix) Bend 45°, (b) 110 mm | 9 | 117.48 | Each | 1057.32 |
| 80 | xi) Door Bend (T.S.), (b) 110 mm | 7 | 194.04 | Each | 1358.28 |
| 81 | xvi) Pipe Clip, (b) 110 mm | 30 | 27.72 | Each | 831.60 |
| 82 | xvii) W.C. Connector (150 mm long) 125 X 110(W/WC Ring) 75 mm | 6 | 187.44 | Each | 1124.64 |
| 83 | xxxi) Plain Floor Trap with Top tile & Strainer 75 mm | 6 | 190.08 | Each | 1140.48 |
| 84 | L) Rubber Ring, (b) 110 mm | 30 | 22.44 | Each | 673.20 |
| 85 | C)Rubber Lubricant 500 ML | 5 | 246.84 | 500 ML | 1234.20 |
| 86 | D)Solvent Cement 250 ML | 5 | 135.96 | 250 ML | 679.80 |
| 87 | Labour for fitting and fixing U.P.V.C. pipes for above ground work including cost of jointing materials etc. fitting and fixing all necessary specials, cutting pipes, cutting holes in total pipeline including specials. (B) Under ground, (ii) 110 mm dia. PWD S&P Schedule, (P. - 74, Item. No. - 24 (B) | 20 | 84.00 | Mtr | 1680.00 |
| 88 | Supplying, fitting & fixing UPVC pipes A- Type and fittings conforming to IS:13592-1992 with all necessary clamps nails, including making holes in walls, floor etc. cutting trenches in any soil through masonry concrete structures etc if necessary and mending good damages including joining with jointing materials (Spun Yarn, Valamoid/Bitumen/M-Seal etc) complete. A) UPVC Pipes: (i) 75 mm. Dia. (P. - 212, Item. No. - 21 (A)(i) , (B),(c),(i) & (B), (d),(i), Pwd volume-i, 2017) | 6 | 237.60 | Mtr | 1425.60 |
| 89 | B) UPVC Fittings: c) Bend 87.5 degree (i) 75 mm. Dia. | 2 | 106.80 | Mtr | 213.60 |
| 90 | B) UPVC Fittings: d) Shoe (i) 75 mm. Dia. | 2 | 98.40 | Mtr | 196.80 |
| 91 | Constructing Inspection pit of inside measurement 600mm X 600mm X upto 600mm (depth) with 250 mm thick 1st. class brick work in cement mortar (1:4) on all sides, bottom of the pit consisting of 100 mm thick cement concrete (1:3:6) with stone chips over a layer of jhama brick flat soling, 15 mm thick (1:4) cement plaster to inside walls and out-side walls upto G.L. and 20 mm.thick (1:4) plaster to bottom of the pit, providing necessary invert with cement concrete (1:3:6) with stone chips as per direction, neat cement finishing to entire internal surfaces, top of the pit covered with 100 mm thick R.C.C. slab (1:1.5:3) with stone chips and necessary reinforcements upto 1% and shuttering including 6 mm thick cement plaster (1:4) in all external surfaces of the slab and one 560 mm dia. R.C.C. manhole cover of approved make supplied, fitted and fixed in the slab with necessary fittings, necessary earthwork in excavation in all sorts of soil, filling sides of the pit with earth and removing spoils after work complete in all respect with all costs of labour and materials. i) With Pakur variety (Other than SAIL/TATA/RINL). PWD S&P Schedule, S.P.87,Item No-1/(i), 7th Corrigenda Volume ii | 3 | 9466.80 | Each | 28400.40 |


| | | | | | |
|------------------|---|----|----------|------|-------------------|
| 92 | <p>Construction of septic tank of different capacities as per approved drawing with 1st class brick work in cement mortar (1:4) including two 560 mm dia. R.C.C. manhole cover (heavy type) of approved make supplied, fitted and fixed in the 100mm thick R.C.C (1:1.5:3) top slab with necessary fittings, 20mm thick cement plaster (4 : 1) with neat cement finish to the internal surfaces and 15 mm thick cement plaster (4 : 1) to outside wall upto 200 mm below G.L floor finished with 25 mm thick grey artificial stone over 100 mm thick R.C.C(1:1.5:3) bottom slab including supplying, fitting and fixing all necessary specials, fittings, S.W. tees, C.I. foot rest etc. including excavation earth in all sorts of soil, shoring, bailing out and pumping out water as necessary, ramming, dressing the bed and refilling the sides of the tanks with earth, removing spoils, filling up the chamber with clear water, removing foreign materials from the chamber and including constructing attached inspection pit as per approved drawing and connecting all necessary pipes, joints etc. with internal plaster work and artificial stone flooring is to be done with admixture of water proofing compound @ 0.5% by weight of cement with all costs of labour and materials.</p> <p>(iv) For 30 users A) With Pakur variety. (JSW/JSPL/SHYAM/SRMB/ELECTROSTEEL/SSL)</p> | 1 | 81638.40 | Each | 81638.40 |
| 93 | <p>Construction of circular soak well 2.5 metre deep in all types of sandy soils with dry brick work upto 1.6 metre from the bottom having 150 mm intermediate cement brick work (1:4) band all round and cement brick work (1:4) upto 0.90 metre from top with 20mm thick cement plastering (1:4) to inside face upto the depth of cement brick work, 15mm thick cement plaster (1:4) on outer face from top of the well upto G.L. and 6 mm thick cement plaster (1:4) on top of the R.C.C. cover slab including filling bottom 1.00 metre of inside of the well with brick metal (50 mm to 63 mm size) including R.C.C. cover slab of 100 mm thick with cement conc (1:1.5:3) with stone chips with necessary reinforcement and shuttering including one 560 mm dia. R.C.C. manhole cover (heavy type) of approved make supplied, fitted and fixed in the cover slab with necessary fittings, making necessary arrangements for pipe connections, excavation of well including shoring, dewatering and removing the excess earth from the premises as per direction complete in all respect with all costs of labour and materials. With 250 mm thick dry brick work and 250 mm thick cement brick work (1:6) and 1.00m inside dia.</p> <p>(Other than SAIL/TATA/RINL)</p> | 1 | 22950.00 | Each | 22950.00 |
| 94 | <p>Supplying, fitting and fixing towel rail with two brackets. (a) C.P. over brass 25 mm dia. and 600 mm long S&P Schedule, p No 82 I No- 22 (a)(ii)</p> <p>(ii) PWD</p> | 12 | 567.60 | Each | 6811.20 |
| 95 | <p>Supplying, fitting and fixing cast iron raised rain proof tank cover 500 mm dia. with locking arrangements (weighing not less than 12 kg). PWD S&P Schedule, . page-37,item no -8</p> | 1 | 1667.16 | Each | 1667.16 |
| 96 | <p>Supplying, fitting and fixing bevelled edged mirror 5.5 mm thick silver red as per I.S. 3438 / 1965 together with brass C.P. hinges. (ii) 600 mm X 450 mm PWD S&P Schedule, P-81, It-15(ii)</p> | 6 | 638.88 | Each | 3833.28 |
| 97 | <p>Supplying, fitting and fixing soap holder. Fibre glass Sanitary and plumbing work schedule P-82, It-18(b)</p> <p>(b)</p> | 16 | 76.56 | Each | 1224.96 |
| 98 | <p>Supplying, fitting and fixing porcelain toilet paper holder of approved make with wooden spindle as necessary. type size 250 mm X 125 mm (A5) Plumbing works p No 83 I No- 23 9i)</p> <p>(i) Roll Sanitary &</p> | 6 | 351.60 | Each | 2109.60 |
| 99 | <p>Supplying, fitting and fixing glass shelf with aluminium guard rails. (a) Ordinary type with 5.5 mm sheet glass (i) 450 mm X 125 mm Sanitary and plumbing work schedule P-81, It-16(a)(i)</p> | 10 | 450.12 | Each | 4501.20 |
| Sub Total Of (A) | | | | | 1103484.32 |
| Add S.G.S.T. @ | | | 9% | | 99313.59 |
| Add C.G.S.T. @ | | | 9% | | 99313.59 |

| | | |
|--|---|-------------------|
| | Cost Of Civil & Sanitary Work | 1302111.50 |
| | Add L.W.C. @ 1% | 13021.11 |
| | Total payable Amount Including L.W.C. | 1315132.61 |
| | Add Contengency @3% | 39063.34 |
| | Total payable Amount Including L.W.C. and contengency | 1354195.95 |
| | Say Rs. | 1354196.00 |
| | | |



 Chairperson
 Board of Administrators
 Kalimpong Municipality


 R. Banally
 S. A. E.
 Kalimpong Municipality


May be Vetted


 Junior Engineer
 Kalimpong Sub- Division
 M.E. Directorate
 Deptt. of U.D.M.A
 Govt. of West Bengal

May be Vetted


 Assistant Engineer
 Siliguri Division, M.E.Dte.
 Govt. Of West Bengal

Vetted


 Executive Engineer
 Siliguri Division, M.E.Dte.
 Govt. Of West Bengal

1957

1958

1959

1960

1961

1962

1963

1964

1965

1966

1967

1968

1969

1970

1971

1972

1973

1974

1975

1976

1977

1978

1979

1980

1981

1982

1983

1984

1985

1986

1987

1988

1989

1990

1991

1992

1993

1994

1995

May be Veried

Junior Engineer
Karnataka State
Department of
Government
Engineering

**Estimate For Non Schedule item for For Public Toilet Block
at Jubilee High School ward no XIII (Model 'F')**

No. Of seat - Male - (W.C. -2 + Urinal -3) & Female - (W.C. -2 + Urinal -2) = Total (W.C. -4 & Urinal -5)

| Sl. No. | Item Description & Item No. | Quantity | Rate | Unit | Ammount |
|---|---|----------|---------------------|---------|-----------------|
| 1 | standard plastic Dustbin (25 litter) | 4 | 350.00 | Each | 1400.00 |
| 2 | Installation Signage | 2 | 2071.00 | Each | 4142.00 |
| 3 | Airfreshner (Pack of 4nos) | 10 | 216.00 | Each | 2160.00 |
| 4 | Airfreshner (Napthaline 250 gm) | 10 | 210.00 | Each | 2100.00 |
| 5 | Supplying paper Napkin | 10 | 50.00 | Each | 500.00 |
| 6 | Supplying Sanitary Napkin (Whisper or similar make 50 pcs) | 10 | 520.00 | Each | 5200.00 |
| 7 | Harpic (blue 500 ml) | 10 | 300.00 | Each | 3000.00 |
| 8 | Harpic (Red 500 ml) | 10 | 150.00 | Each | 1500.00 |
| 9 | Gala double lip floor wiper | 3 | 350.00 | Each | 1050.00 |
| 10 | colin glass or surface cleaner | 6 | 200.00 | Each | 1200.00 |
| 11 | Muriatic Acid | 6 | 145.00 | Each | 870.00 |
| 12 | Bleaching powder | 6 | 120.00 | Each | 720.00 |
| 13 | Dettol ,lifeboy or similar make soap | 12 | 140.00 | Each | 1680.00 |
| 14 | Rubber hand gloves | 12 | 80.00 | Each | 960.00 |
| 15 | Double side plastic brush | 6 | 125.00 | Each | 750.00 |
| 16 | Plastic Broom | 6 | 170.00 | Each | 1020.00 |
| 17 | Signage ACP base & reflective vinyl (E8) | 1 | 3776.00 | Each | 3776.00 |
| 18 | SMS/any other ICT based feedback sysytem (with number displayed on which SMS has to be SentA9 | 1 | 5000.00 | Each | 5000.00 |
| 19 | Glow sign bard name of contact details of the following are displayed prominently-Toilet identifiaction number name of ULB under whose jurisdiction toilet is covered ward number and maintainance authority promenentlydisplayed for eavch toilet block supervisor agency and area Sanitary Inspector (D3) | 1 | 5000.00 | Each | 5000.00 |
| 20 | Mini Tulu Pump | 1 | 4000.00 | Each | 4000.00 |
| 21 | Supplying and fixing sinage with fixing stand post for public toilet for visible to passersby | 1 | 1000.00 | Each | 1000.00 |
| 22 | Supply roaster/register for keeping account of regular cleaning (D1) | 1 | 200.00 | Each | 200.00 |
| 23 | Lettering on toilet wall for display of name and contact details of ULB, ward number and name of mainrtainance authority, Sanitary Inspector etc, (D3) | 1 | 1000.00 | Each | 1000.00 |
| Sub Total Of (B) | | | | | 48228.00 |
| | | | Add S.G.S.T. @ | 9% | 4340.52 |
| | | | Add C.G.S.T. @ | 9% | 4340.52 |
| Cost Of Non Schedule Work | | | | | 56909.04 |
| | | | Add L.W.C. @ | 1% | 569.09 |
| Total payable Amount Including L.W.C. | | | | | 57478.13 |
| | | | Add Contengency @3% | | 1707.27 |
| Total payable Amount Including L.W.C. and contengency | | | | | 59185.40 |
| | | | | Say Rs. | 59185.00 |

May be Vetted

May be Vetted

Vetted








Junior Engineer
Siliguri Division M.E. Dte.
Govt. of West Bengal

Assistant Engineer
Siliguri Division, M.E.Dte.
Govt. Of West Bengal

Chairperson
Board of Administrators
Kalimpong Municipality

Executive Engineer
Siliguri Division, M.E. Dte.
Govt. Of West Bengal
R. Baraily
S. A. E.
Kalimpong Municipality

MODEL DRAWING FOR CONSTRUCTION OF C. T./P.T.
TOILET SEATS 2 NOS URINAL 3 NOS
MODEL NO.- F

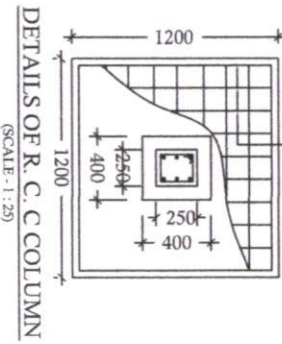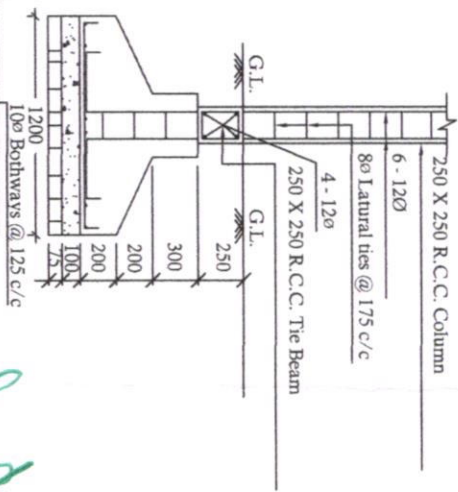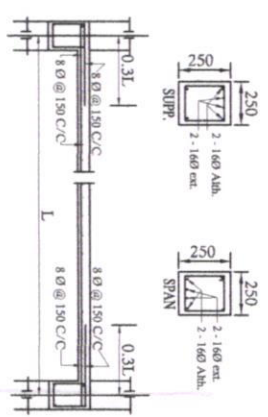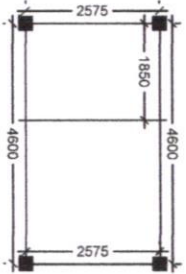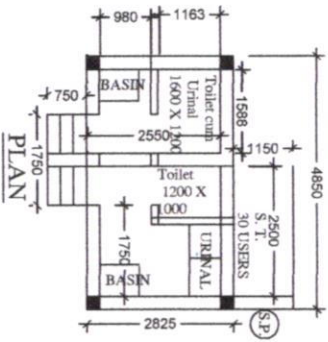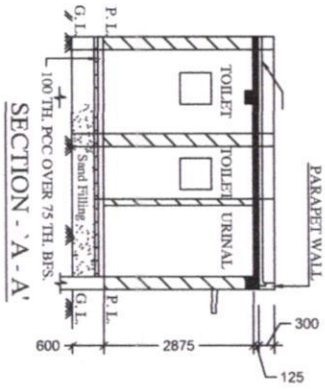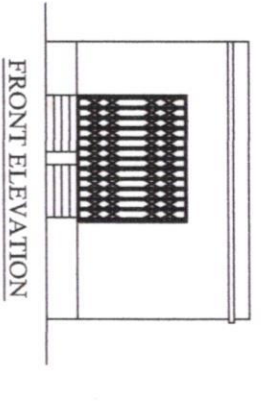

[Signature]
Chairperson
Board of Administrators
Kalimpong Municipality

[Signature]
R. Baidly
S. A. E.
Kalimpong Municipality

МОНІТОРИНГ НАВЧАННЯ ДІТЕЙ І ПІДРОСТКІВ

МОНІТОРИНГ



МОНІТОРИНГ

МОНІТОРИНГ

МОНІТОРИНГ



| Estimate For Non Schedule Item Estimate For Construction of the Public Toilet Block at Jubilee High School ward no XIII (Model 'F') | | | | | |
|--|---|------|----------|------|----------|
| No. Of seat - Male - (W.C. -1 + Urinal -2) & Female - (W.C. -1 + Urinal -1) = Total (W.C. -2 & Urinal -3) | | | | | |
| Sl. No. | Item Description & Item No. | Unit | Quantity | Rate | Amount |
| 1 | Standard plastic Dustbin (12 lits) | Each | 2 | 350 | 700.00 |
| 2 | Sinage ACP based & Reflective vinyl | Each | 5 | 3776 | 18880.00 |
| 3 | Supplying & fixing sinage with fixing stand post for public toilet for visible to passersby | Each | 5 | 1000 | 5000.00 |
| 4 | Glow sign board Name and contact details of the following are displayed prominently - Toilet identification number, name of ULB under whose jurisdiction toilet is covered, ward number and maintenance authority prominently displayed for each toilet block Supervisor, Supervisor's agency and area Sanitary Inspector | Each | 1 | 5000 | 5000.00 |
| 5 | Installation of Sinage | Each | 1 | 2071 | 2071.00 |
| 6 | Air Freshner (Pack of 4 nos) odonil Each 8 216 1728.00 | Each | 8 | 216 | 1728.00 |
| 7 | Air Freshner (Naphthaline 250 gm) | Each | 5 | 210 | 1050.00 |
| 8 | Supplying paper Napkin | Each | 5 | 50 | 250.00 |
| 9 | Supplying Sanitary Napkin (whisper or other similar make | Each | 4 | 520 | 2080.00 |
| 10 | Harpic (Blue 500 ml) | Each | 4 | 300 | 1200.00 |
| 11 | Harpic (Red 500 ml) | Each | 4 | 150 | 600.00 |
| 12 | Gala double lip floor wiper | Each | 4 | 350 | 1400.00 |
| 13 | Colin glass or surface cleaner | Ltr | 2 | 200 | 400.00 |
| 14 | Muriatic Acid | Ltr | 2 | 145 | 290.00 |
| 15 | Bleaching Powder | KG | 4 | 120 | 480.00 |
| 16 | Dettol, Lifebuoy or similar make liquid soap | Ltr | 8 | 140 | 1120.00 |
| 17 | Rubber hand Gloves | Pair | 6 | 80 | 480.00 |
| 18 | Double Side plastic brush | Each | 6 | 125 | 750.00 |
| 19 | Plastic Broom | Each | 4 | 170 | 680.00 |
| 20 | SMS/any other ICT based feedback system Each (with number displayed on which SMS has to be | Each | 1 | 5000 | 5000.00 |
| 21 | Mini Tulu pump | Each | 1 | 4000 | 4000.00 |
| 22 | Supplying roaster/register for keeping account of regular cleaning (D1) | Each | 3 | 200 | 600.00 |
| 23 | Lettering on toilet wall for display of name and contact details of ULB, Ward number and name of | Each | 1 | 1000 | 1000.00 |
| Total Amount Rs- | | | | | 54759.00 |
| Add 1% Labour Cess Rs- | | | | | 547.59 |
| Amount RS- | | | | | 55306.59 |
| Add 3% Contengency Rs- | | | | | 1642.77 |
| Total (Labour Cess + Contengency) Rs- | | | | | 56949.36 |
| Total (Labour Cess + Contengency) Rs- | | | | | 56949.00 |


Chairperson
Board of Administrators
Kalimpong Municipality


R. Banerjee
S. A. E.
Kalimpong Municipality

| Estimate For Non Schedule Item Estimate For Construction of the Public Toilet Block at Jubilee High School ward no XIII (Model 'F') | | | | | |
|---|---|------|----------|------|----------|
| No. Of seat - Male - (W.C. -1 + Urinal -2) & Female - (W.C. -1 + Urinal -1) = Total (W.C. -2 & Urinal -3) | | | | | |
| Sl. No. | Item Description & Item No. | Unit | Quantity | Rate | Ammount |
| 1 | Standard plastic Dustbin (12 lits) | Each | 2 | 350 | 700.00 |
| 2 | Sinage ACP based & Reflecive vinyl | Each | 5 | 3776 | 18880.00 |
| 3 | Supplying & fixing sinage with fixing stand post for public toilet for visible to passersby | Each | 5 | 1000 | 5000.00 |
| 4 | Glow sign board Name and contact details of the following are displayed prominently - Toilet identification number, name of ULB under whose jurisdiction toilet is covered, ward number and maintenance authority prominently displayed for each toilet block Supervisor, Supervisor's agency and area Sanitary Inspector | Each | 1 | 5000 | 5000.00 |
| 5 | Installation of Sinage | Each | 1 | 2071 | 2071.00 |
| 6 | Air Freshner (Pack of 4 nos) odonil Each 8 216 1728.00 | Each | 8 | 216 | 1728.00 |
| 7 | Air Freshner (Naphthaline 250 gm) | Each | 5 | 210 | 1050.00 |
| 8 | Supplying paper Napkin | Each | 5 | 50 | 250.00 |
| 9 | Supplying Sanitary Napkin (whisper or other similar make | Each | 4 | 520 | 2080.00 |
| 10 | Harpic (Blue 500 ml) | Each | 4 | 300 | 1200.00 |
| 11 | Harpic (Red 500 ml) | Each | 4 | 150 | 600.00 |
| 12 | Gala double lip floor wiper | Each | 4 | 350 | 1400.00 |
| 13 | Colin glass or surface cleaner | Ltr | 2 | 200 | 400.00 |
| 14 | Muriatic Acid | Ltr | 2 | 145 | 290.00 |
| 15 | Bleaching Powder | KG | 4 | 120 | 480.00 |
| 16 | Dettol, Lifebuoy or similar make liquid soap | Ltr | 8 | 140 | 1120.00 |
| 17 | Rubber hand Gloves | Pair | 6 | 80 | 480.00 |
| 18 | Double Side plastic brush | Each | 6 | 125 | 750.00 |
| 19 | Plastic Broom | Each | 4 | 170 | 680.00 |
| 20 | SMS/any other ICT based feedback system Each (with number displayed on which SMS has to be | Each | 1 | 5000 | 5000.00 |
| 21 | Mini Tulu pump | Each | 1 | 4000 | 4000.00 |
| 22 | Supplying roaster/register for keeping account of regular cleaning (D1) | Each | 3 | 200 | 600.00 |
| 23 | Lettering on toilet wall for display of name and contact details of ULB, Ward number and name of | Each | 1 | 1000 | 1000.00 |
| Total Amount Rs- | | | | | 54759.00 |
| Add 1% Labour Cess Rs- | | | | | 547.59 |
| Amount RS- | | | | | 55306.59 |
| Add 3% Contengency Rs- | | | | | 1642.77 |
| Total (Labour Cess + Contengency) Rs- | | | | | 56949.36 |
| Total (Labour Cess + Contengency) Rs- | | | | | 56949.00 |

may be vetted
[Signature]
 25/10/21
 Junior Engineer
 Kalimpong Sub-Division M.E.Dte.
 Govt. Of West Bengal

[Signature]
 Chairperson
 Board of Administrators
 Kalimpong Municipality

[Signature]
 R. Banerjee
 S. A. E.
 Kalimpong Municipality

May be Vetted
[Signature]
 Assistant Engineer
 Siliguri Division, M.E.Dte
 Govt. Of West Bengal

Vetted
[Signature]
 Executive Engineer
 Siliguri Division, M.E.Dte.
 Govt. Of West Bengal

NAME OF WORK:- ESTIMATE FOR ELECTRICAL WORK FOR THE CONSTRUCTION OF SCHOOL PUBLIC TOILET AT JUBILEE HIGH SCHOOL WITHIN WARD NO. XIII UNDER KALIMPONG MUNICIPALITY (MODEL NO -F)

* As per PWD & I & WD schedule district charges will be applicable on PWD & I & WD schedule items

* No district charges will be applicable on non-schedule items

13

| SI No. | Iteam Description | Unit | Quantity | District Rate | Amount |
|--------|---|-------|----------|---------------|---------|
| 1 | Distribution wiring in 2 x 22/0.3 (1.5 sqmm) single core stranded 'FR' PVC insulated & unsheathed copper wire (Brand approved by EIC) in 20mm size PVC rigid conduit 'FR' (Precision make), with 1x22/0.3 (1.5 sqmm) single core stranded 'FR' PVC insulated & unsheathed copper wire for ECC, to light/fan/call bell points with Piano Key type switch fixed on MS CRC sheet metal (16 SWG) switch board cum JB on wall complete with 2 no. suitable size "Ph & N" copper bar incl. bakelite/Perspex (wall matching color) top cover 3 mm thick and incl. 175mmx100mmx65mm inspection box, making earthing attachment, painting the MS box and mending good the damages to original finish. [PWD Schedule Page No-E-14 Iteam No-2a] Average run 5 mtr | Point | 12 | 703.80 | 8445.60 |
| 2 | Distribution wiring in 1.1 KV grade 22/0.3 (1.5 sqmm) single core stranded 'FR' PVC insulated & unsheathed copper wire (Brand approved by EIC) in 20mm size PVC rigid conduit 'FR' (Precision make), with 1.1 KV grade 1 x 22/0.3 (1.5 sqmm) single core stranded 'FR' PVC insulated & unsheathed copper wire as ECC, to 5A 3 pin flush type plug socket & Piano Key type switch fixed on MS CRC sheet metal (16 SWG) switch board cum JB on wall incl. bakelite/Perspex (wall matching color) top cover 3 mm thick and incl. painting the MS box and mending good the damages to original finish On Board (only for pay counter) [PWD Schedule Page No-E-15; I-4a] | Point | 1 | 77.05 | 77.05 |
| 3 | Supplying and fixing 240V 32A Double Pole AC Type 30mA RCCB.(Complete Set) (ISI marked) [Make- Legrand] (Cat No 4113/95) [Legrand Page No-92] | Nos | 1 | 5942.00 | 5942.00 |
| 4 | Distribution wiring in 1.1 KV single core stranded 'FR' PVC insulated & unsheathed copper wire (Brand approved by EIC) in 20mm size PVC rigid conduit 'FR' (Precision make) incl. necy. fittings as required 2 x 36/0.3 (2.5 sqmm) + 1 x 22/0.3 (1.5 sqmm) ECC [PWD Schedule Page No-E-14 Iteam No-1a(ii)] | mtr | 10 | 136.85 | 1368.50 |
| 5 | Supplying and fixing double-door SPN MCB Distribution Board with IP-42/43 protection, concealed in wall after cutting the wall & mending good the damages to original finish incl. Inter connection with suitable size of copper wire and neutral link & provision for earthing attachment. a) For (2+4 way) (Make -Havells) [PWD Schedule Page No-D-9;Iteam No-13] | No | 1 | 1075.25 | 1075.25 |
| 6 | Supplying and fixing 240/415 V MCB of Breaking capacity 10kA & C characteristics on din rail of existing DBs and necessary connection 6-32A SP MCB (Make -Havells) [PWD Schedule Page No-D-6;Iteam No-7] | Nos | 4 | 193.20 | 772.80 |
| 7 | Supplying and fixing 240/415 V MCB Isolator on din rail of existing DBs and necessary connection. 40A DP MCB Isolator (Make -Havells) [PWD Schedule Page No-D-5;Iteam No-6] | Nos | 1 | 239.20 | 239.20 |

| | | | | | |
|----|---|------|---|---------|---------|
| 8 | Supply of TMC501 conventional industrial batten (Philips make) LED Tube,model no- TMC501 P1xT-LED 22W P3241 [WB I & WD schedule P-113, I- 5:3 F.22) | Nos | 3 | 464.53 | 1393.59 |
| 9 | Fixing only single/twin fluroscnt light fitting complete with all accessories directly on wall/ceiling by screws etc.. [PWD Schedule Page No-C-2;Iteam No-14a] | Nos | 3 | 98.90 | 296.70 |
| 10 | Supply & fixing Bulk head light fittings with die cast aluminium housing frosted/clear glass on wall/ceiling incl S/F 9 watt LED Lamp complete set. [Make - Havells] (PWD sch - Page--D-13, I-23) | Nos | 3 | 740.85 | 2222.55 |
| 11 | Supply & fixing smart bright street light complete with all accessories to be fixed from the wall of building or on pole incl. making holes /providing clamping arrangement & necy. GI reducer as required.S&F 40 mm GI Pipe 1.5 mtr average length & s&f necy length of 1.5 sqmm pvc insulated single core copper wire & making connections as required & mending good damages incl wall paingting. (30 Watt) (Make - Bajaj) [WB I&WD sch P-111, I-f.9.0.2] | Nos | 1 | 3106.48 | 3106.48 |
| 12 | Supply of 9" domestic metal exhaust fan 9" (225mm)SWEEP. TRANS AIR - (Make-Crompton/Havells/Bajaj) (UD & MA schedule P-14, I-5)) | Nos | 3 | 1863.00 | 5589.00 |
| 13 | Fixing only exhaust fan after making hole in wall and making good damages and smooth cement finish etc. as practicable as possible and providing necy. length of PVC insulated wire and making connection for exhaust of following diameter: 22.5 cm (9") [PWD Schedule Page No-C-4;Iteam No-28(b)] | Nos | 3 | 284.05 | 852.15 |
| 14 | Fixing only louver shutter/cowl on wall with necy. bolts & nuts (6 mm dia x 62 mm long) For 22.5 cm(9") Exhaust fan [PWD Schedule Page No-C-4;Iteam No-30(b)] | Nos | 3 | 94.30 | 282.90 |
| 15 | Supply of 240V A.C Ceiling Fan (48" sweep,1200 mm complete) [Make-Crompton [for counter only] (UD & MA schedule P- 23, I- 70) | Each | 1 | 2283.00 | 2283.00 |
| 16 | Fixing only Ceiling Fan [PWD sch P- C-3, I-21(a)] | Each | 1 | 75.90 | 75.90 |
| 17 | Supply & Fixing 240 V, 16/20 A Piano key type switch (Brand approved by EIC) on sheet metal switch board incl. S & F 100x100x65mm MS (16SWG) switch board and bakelite/perspex top cover of 3mm thick by Brass screws after making housing for switch by cutting bakelite/perspex cover and making necessary connections as required. (For Hand Dryer machine) [PWD sch P- E-6, I-17(b)] | Each | 1 | 231.15 | 231.15 |
| 18 | S/F 240V 25A Modular type starter (brand approved by EIC)with 25 A. Modular switch DP MCB (C-Curve)and 4 Module G.I. Moduar type switch board with 4 Module Top Cover Plate flushed in wall incl. S/F switch board and Cover Plate and making necy. Connections with PVC Copper wire and earth connectivity wire etc. as per schedule [for Pump] [PWD Schedule Page No-E-19, Item No-17] (Please follow in details) | Nos | 1 | 901.60 | 901.60 |

| | | | | | |
|----|--|-----|--------------------|---------|---------------------|
| 19 | Supply and Fixing of 2 mm Polyvinyl glow sign board made of 22 SWG GI sheet box with 1"X1" aluminum channel for fixing the vinyl board after necessary cutting the letter as required & s/f LED tube light fittings along with all accessories. (16 sqft @495.00/sqft) (UD & MA schedule P-14, I-4) | Nos | 1 | 7920.00 | 7920.00 |
| 20 | Earthing installation by GI earth Spike (1830 X 20 mm) including 8SWG GI EarthWire & GI nuts, bolts, washer etc. | Nos | 1 | 450.00 | 450.00 |
| | | | Total | | 43525.42 |
| | | | Add 18% GST | | 7834.58 |
| | | | Total With GST (A) | | 51360.00 |
| | | | Cess@1% | | 513.60 |
| | | | total | | 51873.60 |
| | | | Contingency@3% | | 1540.80 |
| | | | (Total+GST)=Rs: | Total | 53414.40 |
| | | | | Say Rs. | 53414.40 |

Service Connection Charges as per Quotation

Say RS. 53,414.00

M. Roy

Sub Assistant Engineer
Kalimpong Municipality

[Signature]

Chairperson
Board of Administrators
Kalimpong Municipality

Technically Vetted Rs. 53,414.00



(Rupees Fifty three thousand two hundred and fourteen only.)

[Signature]
02-04-25
Junior Engineer
Electrical & Mechanical Division
SUDA


[Signature]
2.4.25
ASSISTANT ENGINEER
ELECTRICAL & MECHANICAL DIVISION
SUDA

[Signature]
24/25
Executive Engineer (E/M)
O/O the Secretary M.E. Dte.
Government of West Bengal


MODEL DRAWING FOR CONSTRUCTION OF C. T./P.T.
TOILET SEATS 2 NOS URINAL 3 NOS
MODEL NO.- F

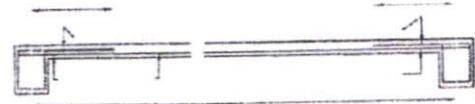


Details Of R.C.C Roof Slab & Beam
(SCALE - 1 : 25)

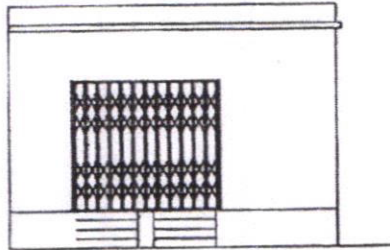


FRONT ELEVATION

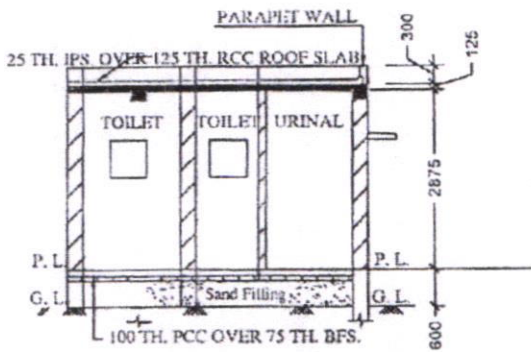

SECTION - 'A - A'

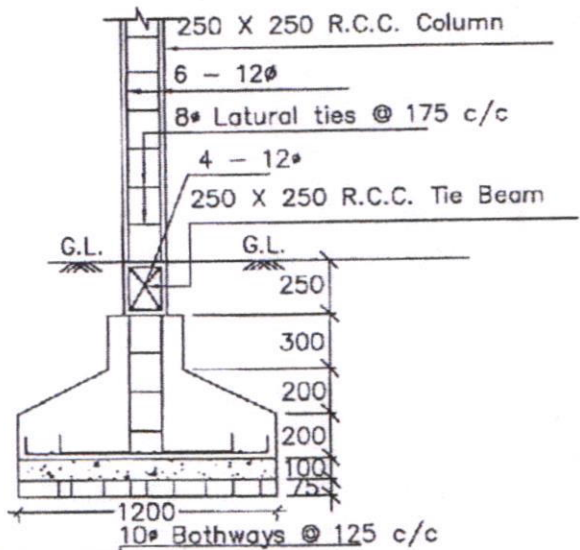

DETAILS OF R. C. C COLUMN
(SCALE - 1 : 25)

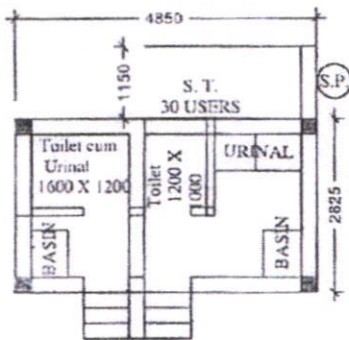

Checked & Verified

Prabir Mukherjee
Engineer (Civil)
Hijli INSPIRATION



- BULK HEAD LIGHT → 03
- TUBE LIGHT → 03
- EXHAUST FAN → 03
- OUTDOOR LIGHT → 01
- CEILING FAN → 01
- GLOW SIGN BOARD → 01

12 pts

Chairperson
Board of Administrators
Kalimpong Municipality

Sub Assistant Engineer
Kalimpong Municipality